



Futurecom Systems Group, ULC

## VR Functional Description R3.2

Applies to: DVR-LX®, DVR & VRX1000

Document: 8K093X02  
Revision: R3.2  
Date: May 2022

## NOTES

# Contents

<b>Contents .....</b>	<b>3</b>
<b>List of Tables .....</b>	<b>7</b>
<b>List of Figures .....</b>	<b>9</b>
<b>Manual Revisions .....</b>	<b>10</b>
<b>Foreword.....</b>	<b>11</b>
<b>Computer Software Copyrights.....</b>	<b>12</b>
Disclaimer .....	12
Trademarks .....	12
<b>Key Terminology .....</b>	<b>13</b>
<b>Introduction .....</b>	<b>14</b>
<b>DVRS Principle of Operation .....</b>	<b>15</b>
VR Models.....	16
Frequency Band of Operation.....	16
In-Band.....	16
Cross-Band .....	20
Band Locking .....	23
DVRS Features by PSU Type – Motorola Infrastructure .....	25
'DVRS Enabled' PSUs .....	26
<b>DVRS Operation and Basic Features .....</b>	<b>28</b>
VR Status Display .....	28
VR Modes of Operation .....	28
OFF Mode .....	29
SYSTEM Mode .....	29
LOCAL Mode .....	30
Selecting VR Mode and Channel.....	31
Activating the VR via the MSU Control Head.....	31
Automatic VR Activation (AVRA) .....	32
GPS DRIVEN DEACTIVATION .....	33
Remote Activation of the VR.....	38
Via Call Alert (Page) to VR .....	38
Via PSU Emergency Alarm.....	38
Via PSU DTMF Tones .....	38
Via System / Dispatcher Call Alert Page to MSU .....	39
'DVRS Enabled' Mobile Radio TGs / Channels.....	40
'DVRS Disabled' Mobile Radio TGs / Channels.....	40

In Car Monitor (ICM) .....	41
Primary / Secondary Operation Basics .....	42
Permanent Primary Activation .....	44
Permanent Primary Deactivation .....	44
Legacy Mobexcom II Voting Compatibility Mode .....	44
Purchasable Software Options .....	44
Configuration Safeguarding .....	44
RM-OTAP (Over The Air Programming) .....	45
SmartConnect In-Vehicle Range Extension .....	45
PSU Scan .....	46
MSU Scan .....	47
Supported MSU Scan Types .....	47
DVRs Enabled / Disabled Rules while MSU Scan is enabled .....	47
Outbound Calls (received by MSU from the FNE) with MSU Scan Enabled .....	47
Inbound Calls (received by DVRs from PSU) with MSU Scan Enabled .....	48
MSU ISSI Roaming .....	48
Unsupported PSU Features .....	49
<b>P25 Digital Mode Operation .....</b>	<b>50</b>
PSU Affiliation .....	51
Group Calls .....	51
MSU Priorities .....	51
PSU Proxy Request Priorities .....	51
MSU Voice and Signaling Proxy Interactions .....	52
Talk Group Proxying .....	52
Talk Group Translation .....	52
Private Calls .....	53
PSU Talk Permit Tones .....	53
Status Broadcast .....	53
Local Mode Indication .....	54
Radio Check / Inhibit .....	54
P25 Trunking OTAR .....	54
Patch .....	54
Dynamic Regrouping .....	55
Phone Interconnect .....	55
Adaptive Power Control .....	55
Digital Audio Buffering .....	55
P25 Encryption .....	56

Remote VR Activation and Steering by PSU Call Alert (Page).....	57
Emergency in Digital Mode.....	58
Emergency Alarm .....	58
Emergency Call.....	58
Emergency Revert through VR .....	59
Emergency Revert through PSU .....	59
Emergency operation during TG Translation.....	59
Fireground (FG) Signaling .....	60
PSU IV&D .....	60
PSU Location Reporting .....	60
PSU Call Alert .....	60
PSU Message .....	61
PSU Status Update and Status Request .....	61
Automatic PSU Revert to Talk Around (TA) .....	61
PSU Group Services .....	61
Group Text .....	61
Group Alias Update.....	62
Personnel Accountability .....	62
VR PSU Authentication .....	62
Encrypted PSU Data .....	63
NAC Linking .....	63
VR System Topologies .....	65
Digital Mode – Summary of Features .....	66
Digital VR Mode with P25 Conventional Mode Selected on MSU .....	69
<b>Forced Analog Channel Type.....</b>	<b>72</b>
Forced Analog Channel Type – Summary of Supported Features .....	73
MSU/System Type: Type II Trunked.....	74
MSU/System Type: P25 Trunking TDMA .....	75
<b>Analog Mode Operation .....</b>	<b>76</b>
VR Channel Setup for Analog Mode.....	76
Group Calls .....	76
Emergency in Analog Mode.....	77
Emergency Alarm .....	77
Emergency Call.....	78
Emergency Revert through VR .....	78
Analog Audio Buffering .....	78
Tactical Public Safety (TPS) .....	78
Fireground (FG) Signaling .....	78
Remote VR Activation via DTMF .....	79
P25 Encryption in Analog Mode .....	79
Leading & Trailing Tones.....	80
Mobile Mode Steering via PL/DPL.....	80

Steering and Emergency .....	80
MSU Operating on TDMA (P25, Phase 2).....	81
Analog Mode – Summary of Features .....	82
Analog VR Mode with P25 Trunking Mode Selected on MSU.....	82
Analog VR Mode with P25 Conventional Mode Selected on MSU .....	84
Analog VR Mode with Conventional Analog Mode Selected on MSU.....	86
Analog VR Mode with 3600 Baud Analog or Digital Trunking Mode Selected on MSU .....	88
<i>Analog VR Mode with P25 Phase II (TDMA) Trunking Mode Selected on MSU.....</i>	<i>90</i>
Analog VRS750 Compatible VRX1000 Mode.....	92
<b>Mixed VR Mode.....</b>	<b>93</b>
<b>Special Features Support .....</b>	<b>94</b>
TPS Signaling .....	94
<b>Data Sheets .....</b>	<b>95</b>
<b>Contact Information .....</b>	<b>96</b>
<b>References.....</b>	<b>100</b>

## List of Tables

Table 1 DVRS Features (Motorola Infrastructure) vs Type of PSU .....	25
Table 2 'DVRS Enabled' PSU Features Support on Non-Motorola Infrastructure .....	27
Table 3 OFF Mode Operation.....	29
Table 4 SYSTEM Mode Operation .....	29
Table 5 LOCAL Mode Operation .....	30
Table 6 AVRA Functionality.....	32
Table 7 Primary VR Definitions .....	43
Table 8 MSU Proxy Request Priorities .....	51
Table 9 PSU Proxy Request Priorities .....	51
Table 10 Inbound P25 Encryption Rules .....	56
Table 11 Outbound P25 Encryption Rules.....	56
Table 12 MSU MIC PTT P25 Encryption Rules .....	56
Table 13 VR System Topologies .....	65
Table 14 Digital Channel Type on DVR/DVR-LX w P25 Trunking Mode Selected on MSU .....	66
Table 15 Digital Channel Type on VRX1000 ( <i>P25 Operation</i> ) & Generic P25 PSUs w P25 Trunked (FDMA) Mode Selected on MSU .....	67
Table 16 Digital Channel Type on VRX1000 ( <i>P25 Enhanced Trunking Features</i> ) w P25 Trunked (FDMA) Mode Selected on MSU .....	68
Table 17 Digital Channel Type on DVR/DVR-LX w P25 Conventional Mode Selected on MSU .....	69
Table 18 Digital Channel Type on VRX1000 ( <i>P25 Operation</i> ) w P25 Conventional Mode Selected on MSU .....	70
Table 19 Digital Channel Type on VRX1000 ( <i>P25 Enhanced Trunking Features</i> ) w P25 Conventional Mode Selected on MSU .....	71
Table 20: Summary of MSU/System Type vs Signalling and Voice Communications....	72
Table 21 Forced Analog VR Channel Type with Conventional Analog MSU/System Type .....	73
Table 22 Forced Analog Channel Type with Type II Trunked MSU/System Type .....	74
Table 23 Forced Analog Channel Type with P25 Trunking TDMA MSU/System Type...	75
Table 24 Analog Channel Type on DVR/DVR-LX with P25 Trunking Mode Selected on MSU .....	82
Table 25 Analog Channel Type on VRX1000 with P25 Trunking Mode Selected on MSU .....	83
Table 26 Analog Channel Type on DVR/DVR-LX with P25 Conventional Mode Selected on MSU .....	84
Table 27 Analog Channel Type on VRX1000 with P25 Conventional Mode Selected on MSU .....	85
Table 28 Analog Channel Type on DVR/DVR-LX with Conventional Analog Mode Selected on MSU .....	86
Table 29 Analog Channel Type on VRX1000 with Conventional Analog Mode Selected on MSU .....	87
Table 30 Analog Channel Type on DVR/DVR-LX with 3600 Baud Analog or Digital Trunking Mode Selected on MSU .....	88
Table 31 Analog Channel Type on VRX1000 with 3600 Baud Analog or Digital Trunking Mode Selected on MSU .....	89
Table 32 Analog Channel on DVR/DVR-LX with P25 Phase II (TDMA) Trunking Mode Selected on MSU .....	90

Table 33 Analog Channel on VRX1000 with P25 Phase II (TDMA) Trunking Mode  
Selected on MSU .....91

Table 34 Analog VRS750 Compatible VRX1000 Mode .....92



## List of Figures

Figure 1 DVRS Conceptual Diagram.....	15
Figure 2 In-Band Full Duplex / Simplex Capable DVRS - Conceptual Diagram .....	18
Figure 3 In-Band Simplex Only Capable DVRS - Conceptual Diagram .....	18
Figure 4 Vehicular Mount In-Band 700 or 800MHz DVRS Model - Full Duplex & Simplex Capable.....	19
Figure 5 Vehicular Mount In-Band VHF or UHF DVRS Model - Full Duplex & Simplex Capable.....	19
Figure 6 Cross-Band Full Duplex & Simplex Capable DVRS - Conceptual Diagram.....	20
Figure 7 Cross-Band Simplex Only Capable DVRS - Conceptual Diagram .....	21
Figure 8 Vehicular Mount Cross Band DVRS Model – Full Duplex & Simplex Capable .	22
Figure 9 Vehicular Mount Cross Band DVRS Model - Simplex Only Capable .....	22

## Manual Revisions

[illegible]

## Foreword

Futurecom Vehicular Repeater (**VR**) is designed to be seamlessly interfaced to:

- Remote Mount APX Series **MSU** with or without control head

When the VR is interfaced to a Remote Mount Motorola APX Mobile Radio, the complete equipment package is referred to as Digital Vehicular Repeater System (**DVRS**).

For requirements on compatible Mobile and Portable radios visit the Futurecom website: Home > Support > Documentation and Software > DVR-LX/DVR/VRX1000 > Firmware Upgrades > Compatibility Charts

For details on the APX series Mobile or Portable Radios operation, please refer to the applicable Manuals available from Motorola.

For details on how to operate a VR, please refer to the Vehicular Repeater (VR) User's Guide Template available on the Futurecom website > Support Portal > Documentation and Software > DVR-LX/DVR/VRX1000 > User Guide.

## Computer Software Copyrights

The products described in this manual include copyrighted Futurecom computer programs stored in semiconductor memories or other media. Laws in the United States, Canada and other countries preserve for Futurecom certain exclusive rights for copyrighted computer programs, including but not limited to, the exclusive right to copy or reproduce in any form the copyrighted computer programs. Any copyrighted computer program contained in the Futurecom products described in this manual may not be copied, reproduced, modified, reverse-engineered, or distributed in any manner without the express written permission of Futurecom. The purchase of Futurecom products shall not be deemed to grant either directly or by implication, estoppels, or otherwise, any license under the copyrights, patents or patent applications of Futurecom, except for the normal non-exclusive license to use that arises by operation of law in the sale of a product.

### Disclaimer

The information in this document is carefully examined and is believed to be entirely reliable. However, no responsibility is assumed for inaccuracies. Futurecom Systems Group, ULC. reserves the right to make changes to any products herein to improve reliability, function or design. Futurecom does not assume any liability arising out of the application or use of any product or circuit described herein.

### Trademarks

Futurecom, DVR-LX®, PDR8000®, the Futurecom Logo and the Stylized FC logo are registered trademarks of Futurecom Systems Group, ULC. All other trademarks are the property of their respective owner. © 2022 Futurecom Systems Group, ULC. All rights reserved.

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners.


## Key Terminology

TERM	DESCRIPTION
<b>VR</b>	Futurecom line of Vehicular Repeaters. It applies to any of the following products: DVR, DVR-LX <sup>®</sup> and VRX1000.
<b>DVRS</b>	When a Vehicular Repeater (DVR/DVR-LX <sup>®</sup> /VRX1000) is interfaced with an MSU, the complete equipment package is referred to as a Digital Vehicular Repeater System (DVRS).


## Introduction

The P25 Digital Vehicular Repeater System (**DVRS**) allows Portable Subscriber Units (**PSU**) to be used in areas where only Mobile Subscriber Unit (**MSU**) coverage is available and PSU coverage is either intermittent or nonexistent.

Installed in the trunk of a car, fire truck, armored vehicle, ambulance or configured as a Suitcase Mount or Fixed mount VR, the DVRS extends radio communications when the PSU users are outside of the vehicle, inside a nearby building or in any PSU marginal coverage areas.

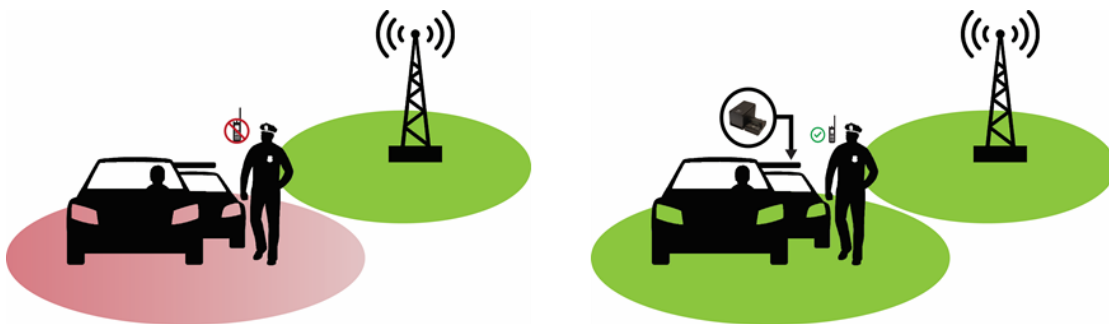

**POLICE VEHICLE MOUNT SCENARIO: PSU COVERAGE RANGE- WITHOUT vs WITH VR**

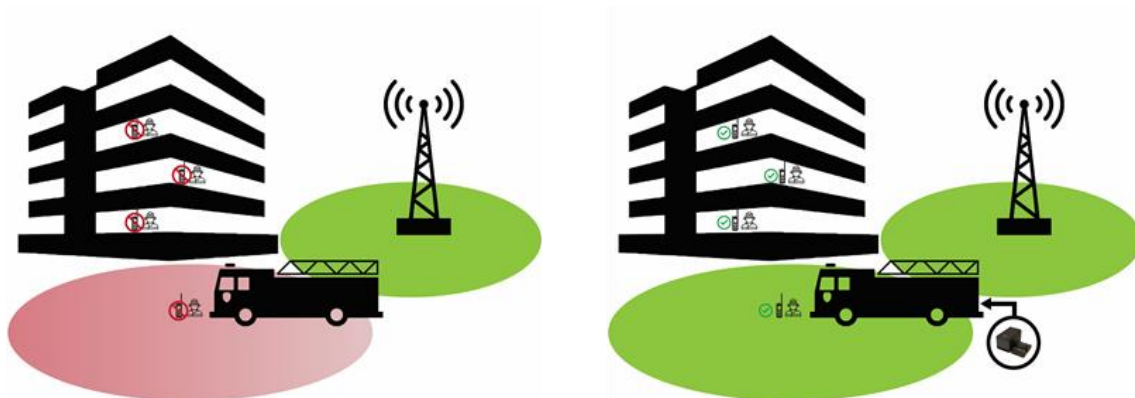


**FIRE VEHICLE MOUNT SCENARIO: PSU COVERAGE RANGE- WITHOUT vs WITH VR**

The DVRS not only extends voice (clear or encrypted) communications but also supports key Trunking system features and can be configured to provide various advanced options to the PSU Users.

## DVRS Principle of Operation

The P25 VR is a versatile, digital repeater<sup>1</sup>, designed to be seamlessly interfaced to a Remote Mount APX MSU (see **DVRS: VR Compatible APX Mobile Radios<sup>2</sup>** list). The VR is controlled from (and its status is displayed on) the MSU Control Head and is equipped with all necessary filtering for interference-free operation.

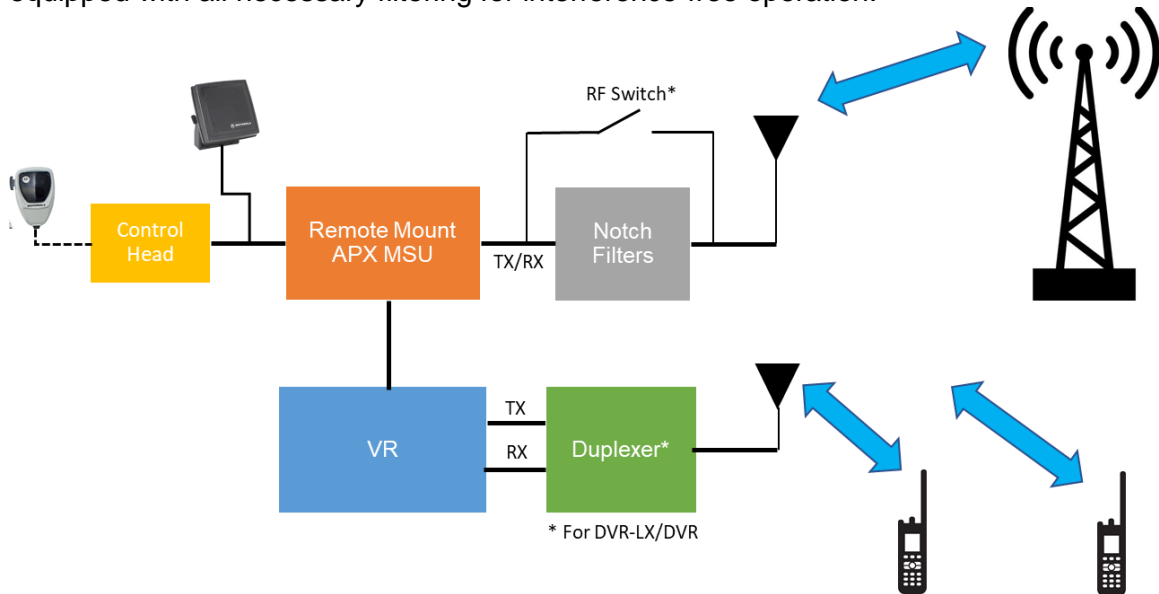

Note: RF Switch is standard with DVR/DVR-LX and optional for VRX1000

**Figure 1 DVRS Conceptual Diagram**

When the VR is activated in SYSTEM mode, any Outbound Calls on **TG X** (selected on the local PSUs) are repeated to the local PSUs over the selected VR conventional digital channel (**CH1 TG X**). When a local PSU switched to **CH1 TG X** makes a call, the VR repeats it locally on **CH1 TG X** as well as to the system by keying up the MSU on **TG X**.

**NOTE:**

The MSU may have a different TG selected on its control head yet the local PSUs can communicate on their selected TG if TG Proxying is enabled in the VR. If TG Translation is enabled in the VR, then all calls received from the local PSUs are translated to the TG currently selected on the MSU and transmitted to the P25 Trunked system.

Simplex VR operation is also supported and is programmable per channel or imposed by VR model selection.

<sup>1</sup> DVR/DVR-LX are full duplex VR while VRX1000 is simplex only

<sup>2</sup> Latest list published on Futurecom website > Support > Documentation and Software > DVR-LX/DVR/VRX1000 > Compatibility Chart

## VR Models

### Frequency Band of Operation

Depending on the frequency band of operation of the APX Mobile Subscriber Unit (MSU) and VR, the VR models are classified as follows:

- **In-Band** – when the MSU and VR operate in the same frequency band.
- **Cross-Band** – when the MSU and VR operate in different frequency bands.

### In-Band

The in-band VR models are equipped with two sets of filters that are required to ensure interference-free operation when both the MSU and VR are transmitting and receiving simultaneously in the same frequency band. The DVR / DVR-LX are full duplex capable repeaters, equipped with a duplexer, which provides sufficient isolation to prevent desense during VR repeat activation. The VR filters also provide 40 dB isolation on the mobile radio transmit / receive frequencies. The filters installed at the output of the MSU are designed to provide 40 dB isolation on the VR transmit and receive frequencies.

#### **IMPORTANT!**

**The above filtering isolation must be complemented by 30dB minimum antenna isolation (between the VR and mobile radio antennas) to ensure interference-free operation. It is recommended that the mobile antenna is mounted on the roof of the vehicle while the VR antenna is mounted on the trunk. Each VR is equipped with custom filters tuned to the specified frequency bands – note the frequency range specified on the filter labels. Programming the VR / mobile radio to operate on frequencies outside of the original specified bands may result in intermittent or complete loss of communications. Frequency changes may require filter retuning or replacement.**

The RF Switch by-passes the in-band mobile notch filter when a “DVR-Disabled” talkgroup or channel is selected (**Figure 2 In-Band DVR / DVR-LX - Conceptual Diagram** and **Figure 3**). This allows the MSU to operate over its full bandwidth and prevents loss in transmit power. If the RF Switch is not utilized, the MSU utilizing the same band as the VR will not function on certain frequencies, or could have a loss in transmit power.


The RF Switch is internally mounted in the DVR/DVR-LX mobile notch filter assembly or a stand alone RF Switch for the VRX1000.

When a “VR – Enabled” TG is selected on the MSU CH, the RF Switch automatically connects the extra filters between the MSU antenna port and the MSU antenna to ensure interference-free operation. The complex in-band filtering is only feasible if sufficient frequency gap is present between the VR frequencies and the MSU frequencies associated with the “VR - Enabled” TGs. For more information on the feasible filtering options, please refer to the VR Ordering Guides. As an option, an in-band DVR / DVR-LX can also be configured as simplex only (**Figure 3**). The simplex in-band configuration however still requires DVR in-band filters.




**IMPORTANT!**


**In all In-Band VR configurations, the MSU Transmit power must not exceed 50 Watts on DVRS Enabled MSU Modes due to the in-band filters power rating. The in-band filters connected to the MSU have typical insertion loss of 1.5dB.**

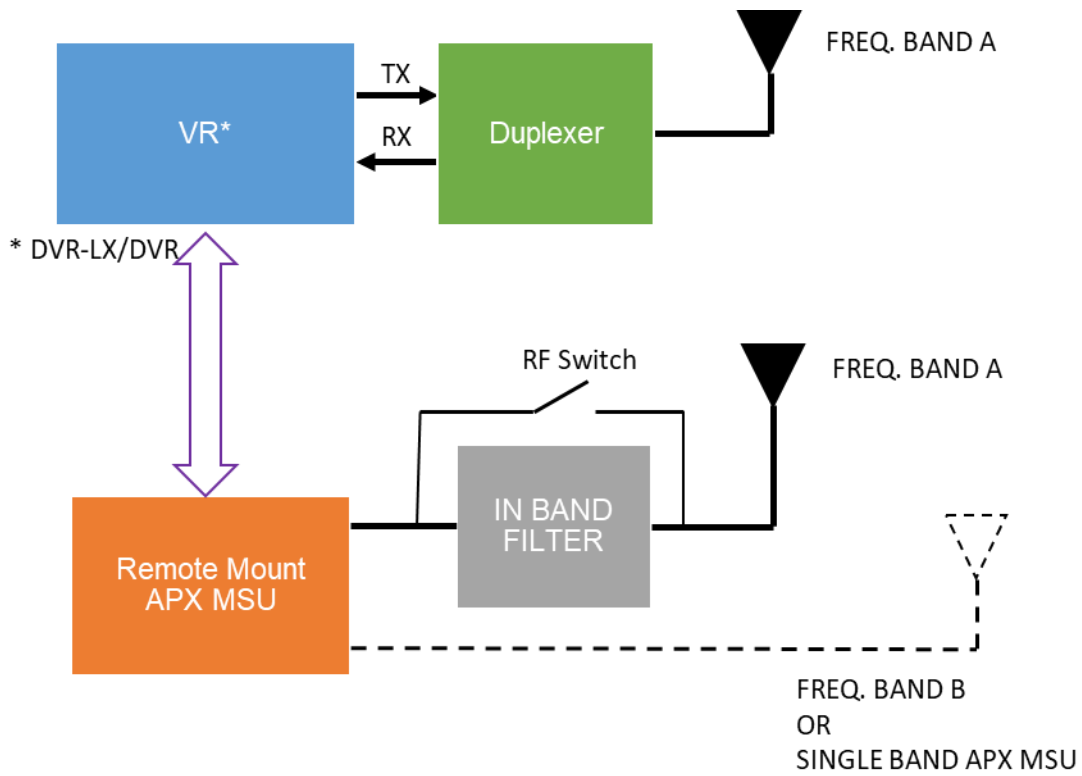


**Figure 2 In-Band DVR / DVR-LX - Conceptual Diagram**

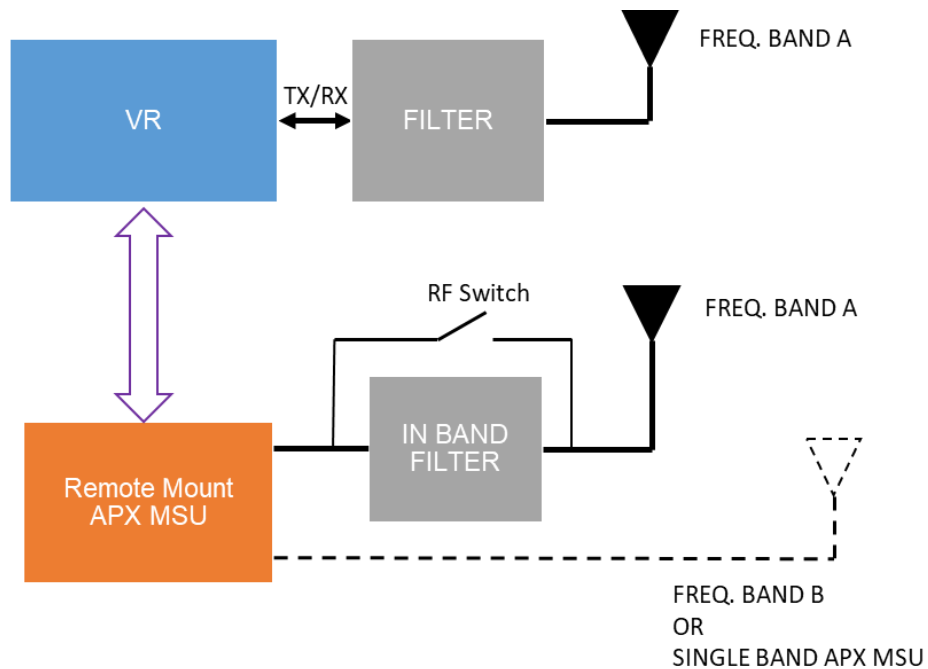

**Figure 3 In-Band Simplex DVR / DVR-LX / VRX1000 - Conceptual Diagram**

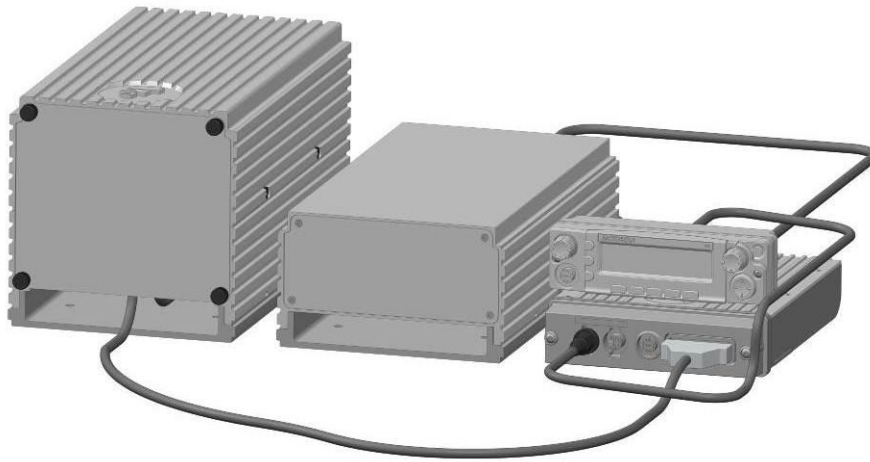


**Figure 4 Vehicular Mount In-Band 700 or 800MHz DVRS Model - Full Duplex & Simplex Capable**

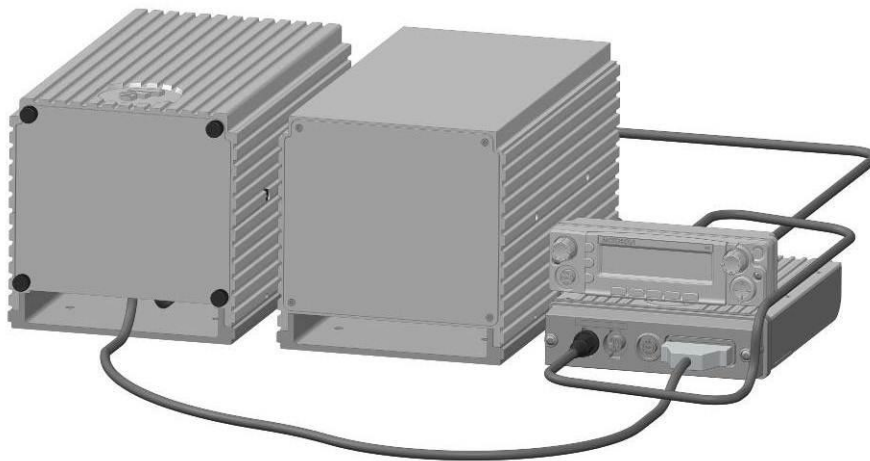

**Figure 5 Vehicular Mount In-Band VHF or UHF DVRS Model - Full Duplex & Simplex Capable**

## Cross-Band

Cross-Band VR models do not include any filters on the MSU side since the MSU and VR are not intended to simultaneously operate in the same frequency band. In single band MSU configurations the MSU and VR operate in different frequency bands. In dual band MSU configuration either the MSU & VR operate in 3 different frequency bands or one of the MSU frequency bands is locked out when VR operation is enabled as shown on **Figure 6**.

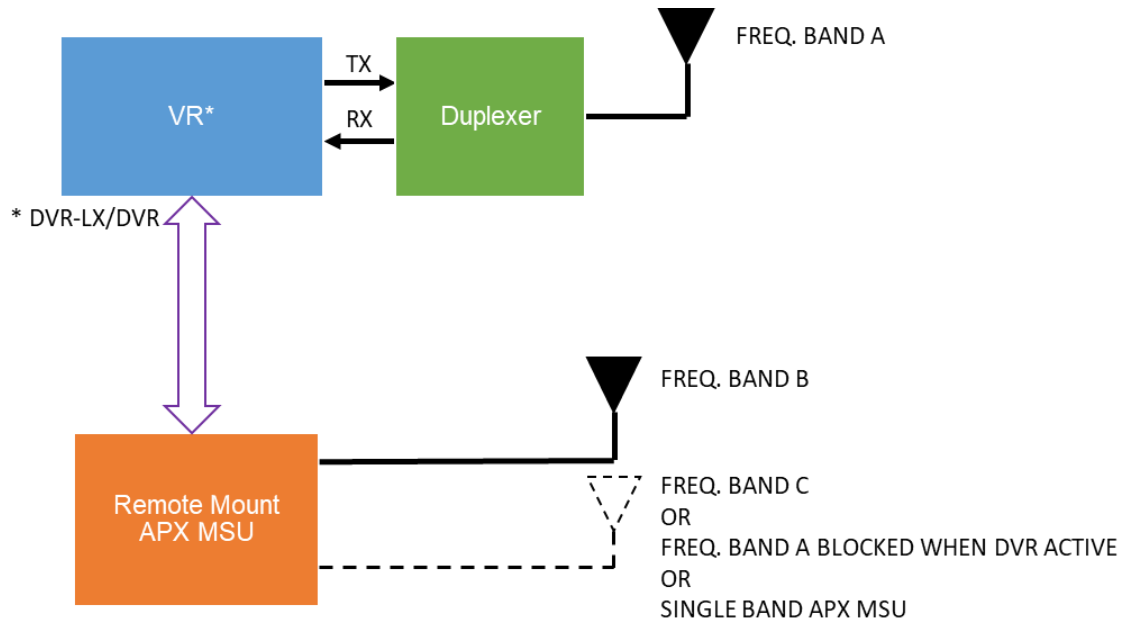


**Figure 6 Cross-Band DVR / DVR-LX - Conceptual Diagram**

The cross-band DVR / DVR-LX typically includes a duplexer which can accommodate full duplex and simplex VR operation as shown on **Figure 6**. The cross-band duplexer however has a limited pass-band window and is tuned to the VR frequencies provided on the purchase order.

To ensure interference-free performance when using VR with APX 8500 Mobile Radio, additional equipment or isolation may be required. Please refer to the VR Ordering Guides or contact [sales@futurecom.com](mailto:sales@futurecom.com) for more information.

As an option, a cross-band DVR / DVR-LX can be configured for simplex **only** operation as shown on

Figure 7. In this case the DVR / DVR-LX does not utilize any filters.

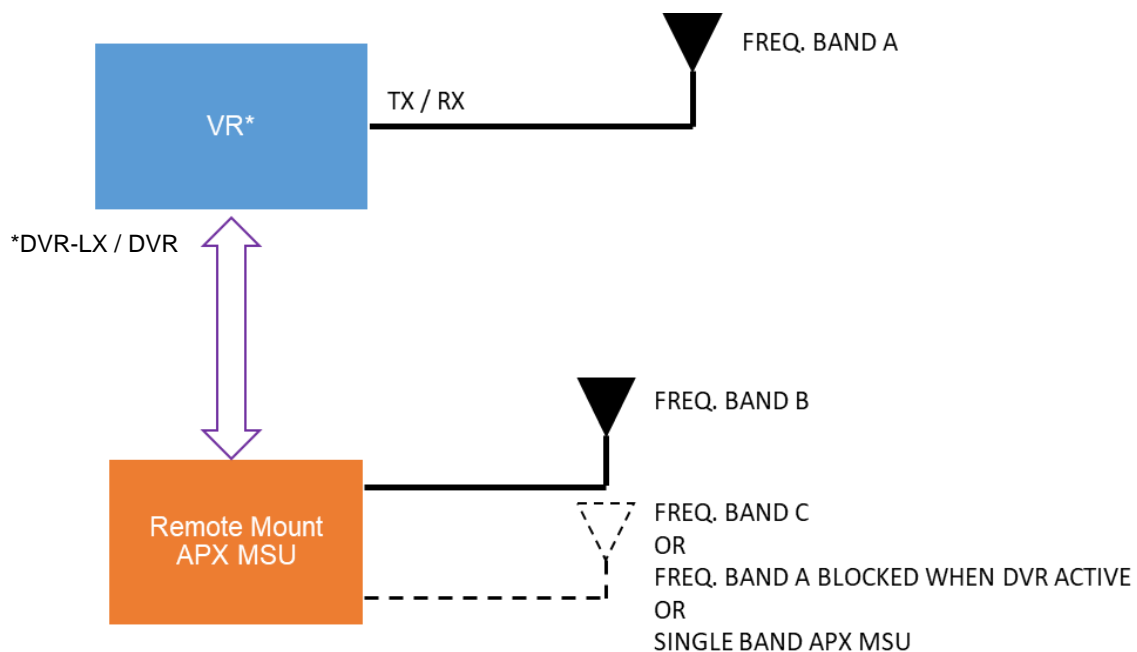

**Figure 7 Cross-Band Simplex DVR-LX / VRX1000 - Conceptual Diagram**


APX 8500 may require interface kit. Please refer to the VR Ordering Guides.

**NOTE:**


The vehicular (side-by-side) mount Cross-Band VR can be interfaced to a High Power MSU, however, the transmit power of the MSU must be reduced to comply with the maximum power restrictions described in the RF Safety Booklet 8F083X03, which is provided with the VR.

**IMPORTANT!**

The VR is shipped equipped with custom filters tuned to the specified frequency range provided by the Customer. Programming the VR / MSU to operate on frequencies outside of the original specified bands may result in intermittent or complete loss of communications. Frequency changes may require filter retuning or replacement.

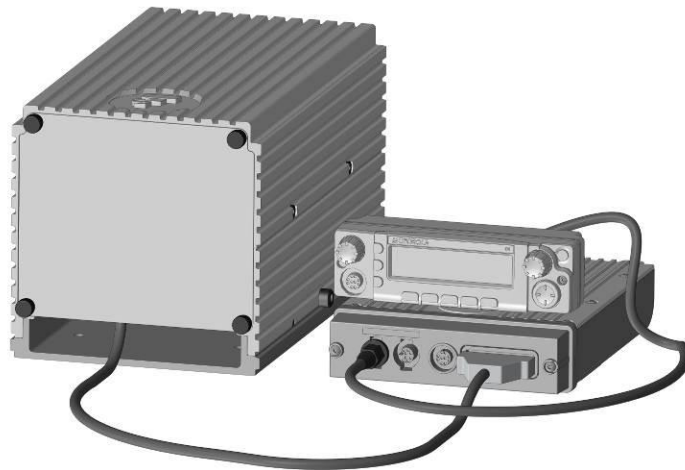

**Figure 8 Vehicular Mount Cross Band DVRS Model – Full Duplex & Simplex Capable**

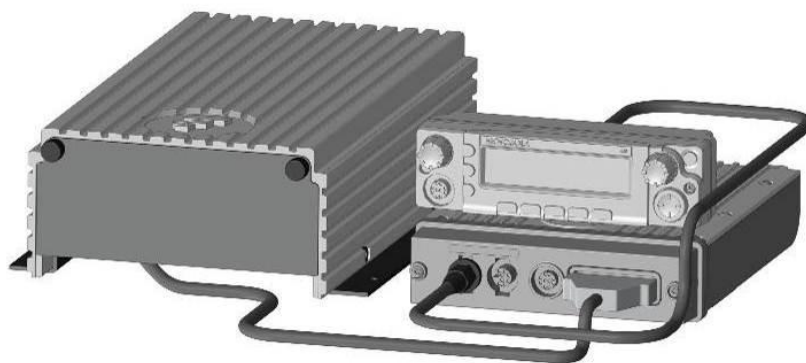

**Figure 9 Vehicular Mount Cross Band DVRS Model - Simplex Only Capable**

## Band Locking

When both the MSU and VR are configured to operate in the same frequency band, two in-band sets of filters are required. (one placed at the MSU Antenna port and another placed at the VR Antenna port). The frequency specific in-band filters are required to prevent interference when the VR and MSU.

When the in-band filter is not present ('MSU RF Bypass switch' in the FRC Hardware setup screen is unchecked), the Band Lock feature must be enabled (by using the FRC) to prevent VR operation on MSU channels that are explicitly using the same frequency band as the VR. On MSU channels where the frequency band is not explicitly known such as in multi-site Trunking systems, the MSU will be prevented from using frequencies in the same band while the VR is active (i.e. in SYSTEM or LOCAL mode). In this case the MSU will no longer allow roaming to sites using the locked-out band. If the MSU is currently on a Trunking site that uses the locked-out band, the MSU will roam to another site. If no other sites are available, the MSU will become 'Out Of Range'. When the VR is inactive (OFF mode), the MSU frequency band is unlocked.

If Band Locking is disabled in the Futurecom Repeater Configurator, the MSU is allowed to roam to any site regardless of the frequency band. A typical in-band application that may require Band Locking to be disabled is the Fixed DVRS application when the MSU and VR antennas are mounted in such way as to provide minimum 70dB of isolation and in-band filtering is not required.

For MSU conventional channels where the band is known and fixed, the VR restricts access to channels using the locked-out frequency band.

If Band locking is enabled in the VR and SCAN is enabled in the MSU, the MSU will skip over any channels in the scan list that are configured to operate in the same frequency band as the VR.

### **IMPORTANT!**

**A 700MHz VR interfaced to an APX MSU operating on 800MHz as well as an 800MHz VR interfaced to an APX MSU operating on 700MHz are considered In-Band applications and either In- Band filters must be provided, or band locking must be enabled (if the MSU is dual band and VR operation can be supported on the non 700/800MHz band).**

**The above is also valid for any of the UHF Bands – if the MSU operates on any of the UHF ranges, an UHF VR interfaced to it will require in-band filters to be installed or band locking to be enabled.**

### **Suitcase Mount DVRS**

The DVRS is packaged in a durable suitcase and includes all necessary electronics and filtering. The unit can be easily deployed in the field and is powered up either by plugging into an AC outlet or by using an optional battery backup kit. The battery backup kit is also packaged in a suitcase for ease of transportation.

The Suitcase Mount model requires two or more antennas - one or more connected to the MSU and one to the VR. The MSU antennas need to be strategically deployed to ensure reliable link between the MSU and the Radio System Infrastructure. The VR antenna needs to be positioned to provide optimum radio coverage for the portable radio users.

### **Rack Mount DVRS**

The DVR-LX<sup>®</sup> Rackmount Repeater with optional 50-watt amplifier fills challenging coverage gaps. The rack-mountable tray fits in a standard 19" rack. It seamlessly integrates with Motorola Solutions APX<sup>™</sup> mobile radios to provide reliable RF backhaul.



***Suitcase Mount***



***Rack Mount***



## DVRS Features by PSU Type – Motorola Infrastructure

When the PSU User is out of System Radio Coverage, the PSU can be switched to a dedicated VR channel so that the PSU can communicate via the VR. The features available to the PSU User depend on the PSU type, programming and selected mode.

The table below specifies what features are supported by the different PSU types on Motorola Infrastructure only.

PSU FEATURE SUPPORT BY DVRS	DVRS Enabled PSU [Note 5]	Generic P25 PSU	Analog PSU
<b>Adaptive Power Control</b>	Yes	Yes [Note 6]	No
<b>Announcement Group</b>	No	No	No
<b>Call Alert/ Page</b>	Yes	Yes	No
<b>Dynamic Regrouping</b>	Yes	No	No
<b>Emergency Call / Alarm</b>	Yes	Yes	Yes
<b>Emergency ID Pass through</b>	Yes	Yes	Yes [Note 2]
<b>End to End digital on TDMA P25 Phase 2</b>	Yes	No	No
<b>Group Calls</b>	Yes	Yes	Yes
<b>Leading / Trailing Tones (sent over the air)</b>	No	No	Yes
<b>Local Mode Indication</b>	Yes	No	No
<b>NAC Linking</b>	Yes [Note 13]	No	No
<b>P25 Encryption</b>	Yes	Yes	No
<b>P25 Trunking OTAR</b>	Yes	No	No
<b>Patch</b>	Yes	No	No
<b>Personnel Accountability (Network Server)</b>	Yes [Note 11]	No	Yes [Note 12]
<b>Personnel Accountability (Local)</b>	No	Yes [Note 12]	Yes [Note 12]
<b>Phone Interconnect</b>	[see Note 9]	No	No
<b>Private Calls</b>	Yes	No	No
<b>PSU Authentication</b>	Yes	No	No
<b>PSU Emergency Revert</b>	Yes	Yes	Yes
<b>PSU Group Services</b>	Yes [Note 7]	No	No
<b>PSU Hot Mic</b>	Yes [Note 4]	No	No
<b>PSU LOCATION</b>	Yes	No	No
<b>PSU PTT ID</b>	Yes	Yes	Yes [Note 2]
<b>PSU SCAN</b>	Yes [Note 8]	Yes	Yes
<b>Radio Check / Radio Inhibit</b>	Yes	Yes	No
<b>Registration / Deregistration</b>	Yes	Yes [Note 1]	Yes [Note 3]
<b>Remote VR Activation by PSU</b>	Yes (Call Alert)	Yes (Call Alert)	Yes (DTMF)
<b>Remote VR Activation by PSU Emergency Alarm</b>	Yes	Yes	Yes (MDC1200)
<b>Selector Lock / Unlock</b>	No	No	No
<b>SmartConnect</b>	Yes	No	No
<b>System Status Broadcast (Failsoft, Out Of Range, Site Trunking)</b>	Yes	No	No
<b>Talk Group Proxying / Translation</b>	Yes	Yes	No
<b>Talk Permit Tones (generated by PSU)</b>	Yes	No	No

Table 1 DVRS Features (Motorola Infrastructure) vs Type of PSU

- Note 1 When selecting a VR Mode on the Generic P25 PSU, it registers upon first Group Call. Generic PSU is deregistered after a preprogrammed timer counting the period of inactivity expires.
- Note 2 Supported only with MDC1200 capable portables.
- Note 3 Analog PSU is registered on the P25 system with its MDC1200 ID.
- Note 4 Requires firmware R12.00.13 or later in the XTS 'DVRs Enabled' PSU and R07.00.05 or later if using APX 'DVRs Enabled' PSU.
- Note 5 The PSU models that can be programmed as DVRs Enabled are described in DVRs: VR Compatible XTS/APX Portable Radios list in Compatibility Matrix.
- Note 6: Motorola Solutions XTS or APX series PSUs in non DVRs Enabled mode
- Note 7: Group Services are supported on APX 'DVRs Enabled' PSUs only (R14.50.00 or later in PSU/MSU) and FDMA Systems only.
- Note 8: Must have Conventional Scan feature loaded as well as PSU Scan option enabled on all VR channels that will be used by PSUs with Conventional Scan option enabled
- Note 9: Phone Interconnect is not supported on VRX1000, but available on DVR or DVR-LX
- Note 10: Supported on FDMA Systems only
- Note 11: Must be Motorola P25 Trunking System with APAA server available on the Motorola network
- Note 12: Must have local accountability client with RF modem
- Note 13: Digital VR Channels only

### **'DVRs Enabled' PSUs**

For a list of portable radios have firmware that allows enhanced communications with the VR and support of an extended list of features visit the Futurecom website:  
Home > Support > Documentation and Software > DVR-LX/DVR/VRX1000 > Firmware Upgrades > Compatibility Charts

All other P25 capable PSU models, or the above models with either older firmware versions or when not programmed as **'DVRs Enabled'**, can only be programmed as 'P25 Generic' since they are not capable of extended communications with the VR.

**'DVRs Enabled' PSU Features Support on Non-Motorola Infrastructure**

<b>'DVRs Enabled' PSU Feature Support</b>	<b>HARRIS P25 Trunked FDMA</b>	<b>CASSIDIAN P25 Trunked FDMA</b>
<b>Automatic Revert to TA when no VR</b>	Yes	Yes
<b>Data</b>	Not Supported	Not Supported
<b>FNE NO COMMS indication through DVRs</b>	Yes	Yes
<b>In Car Monitor</b>	Yes	Yes
<b>Limited Features support on P25 TDMA FNE</b>	Yes (Group Voice, PTT-ID and Emerg Alarm/Call)	Not Supported
<b>MSU MIC PTT with VR ON</b>	Yes	Yes
<b>MSU Votescan</b>	Not Supported	Not Supported
<b>NAC Linking</b>	Yes	Yes
<b>Out Of Range / Site Trunking indication on PSU</b>	Yes	Yes
<b>Personnel Accountability</b>	Not Supported	Not Supported
<b>PSU Adaptive Power Control</b>	Yes	Yes
<b>PSU Call Alert Page</b>	Yes	Yes
<b>PSU Dynamic Regrouping</b>	Not Supported	Not Supported
<b>PSU Emergency Call / Alarm</b>	Yes	Yes
<b>PSU Emergency ID Pass Through</b>	Yes	Yes
<b>PSU Group Calls</b>	Yes	Yes
<b>PSU Hot Mic</b>	Yes	Yes
<b>PSU LOCATION</b>	Yes	Yes
<b>PSU OTAP</b>	Not Supported	Not Supported
<b>PSU P25 Encryption</b>	Yes	Yes
<b>PSU P25 Trunking OTAR</b>	Yes - Limited	Yes
<b>PSU Patch &amp; Simulselect</b>	Yes	Yes
<b>PSU Phone Interconnect</b>	Yes	Yes
<b>PSU Private Call II <sup>3</sup></b>	Yes	Yes
<b>PSU PTT ID</b>	Yes	Yes
<b>PSU Radio Check / Radio Inhibit</b>	Yes	Yes
<b>PSU Registration / Deregistration</b>	Yes	Yes
<b>PSU Scan</b>	Yes - Limited	Not Supported
<b>PSU Status / Message</b>	Yes	Yes
<b>PSU Talk Group Proxying / Translation</b>	Yes	Yes
<b>Remote MSU Channel Steering via PSU Call Alert Page to VR ID</b>	Yes	Yes
<b>Remote VR Activation by PSU Call Alert Page to VR ID</b>	Yes	Yes
<b>Remote VR Activation by PSU Emergency Alarm Retries</b>	Yes	Yes
<b>SmartConnect</b>	Not Supported	Not Supported
<b>Talk Permit Tones (generated by PSU)</b>	Yes	Yes
<b>VR Local Mode Indication on PSU</b>	Yes	Yes
<b>VR OOR indication on PSU</b>	Yes	Yes

**Table 2 'DVRs Enabled' PSU Features Support on Non-Motorola Infrastructure**

<sup>3</sup> PCII Support only; Enhanced Private Calls are only supported on Motorola Infrastructure.


## DVRS Operation and Basic Features

### VR Status Display

The VR Status is displayed on the MSU Control Head. The VR current mode and channel alias are displayed on the top line (for example VR SYS CHAN1) and the VR Status icon indicates if a VR is transmitting, receiving, is a Primary or a Non-Primary etc.

### VR Modes of Operation

When a 'DVRS Enabled' TG / Channel is selected on the control head, the VR can be switched to one of the following modes – OFF, LOCAL or SYSTEM.

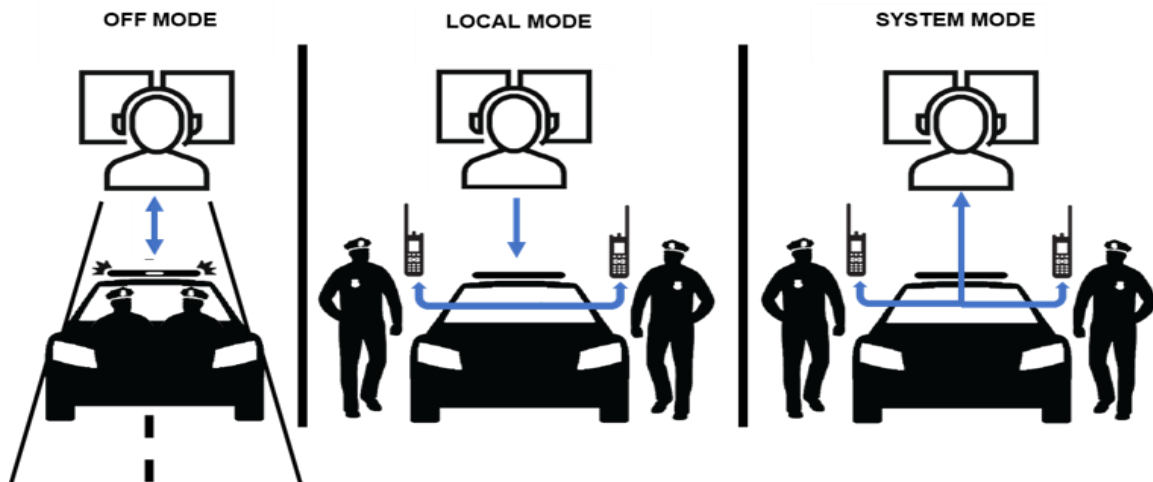

**OFF** mode is used when the VR repeat is not required (for example while the PSU user is in the vehicle driving).

**LOCAL** mode is used in some tactical applications when only portable-to-portable communications are required. Inbound calls are not repeated to the system in the **LOCAL** mode, i.e. the calls received by the VR are repeated locally but the MSU does not key up. As an option, the VR can be programmed to repeat system outbound calls to the local PSU Users.

**SYSTEM** mode enables full VR repeat – locally and to the system. Outbound calls received by the mobile radio are repeated by the VR to the local PSUs over the VR channel. Inbound calls received by the VR are repeated locally (portable-to-portable) as well as to the system users (by keying up the mobile radio). As an option the VR can be programmed to key up only the MSU while the VR is in the **SYSTEM** mode.

When a 'DVRs Enabled' TG / Channel is selected on the APX MSU control head, the VR can be switched to one of the following modes – OFF, LOCAL or SYSTEM.

### OFF Mode

ACTIVITY	OFF MODE ACTION
Control Head Display	VR OFF <DVR CH Name>
DVRS Button Press	Short high-pitched tone. VR Control Mode is accessible.
MSU Receiving from System	VR does not repeat audio received by MSU. MSU Speaker Audio present.
MSU User PTTs the MSU Microphone	MSU Keys up. VR does not key up.
PSU Activity on DVR channel	VR Transmit Function Disabled i.e. No VR repeat. No Speaker Audio.

Table 3 OFF Mode Operation

### SYSTEM Mode

ACTIVITY	SYSTEM MODE ACTION
Control Head Display	VR SYS <DVR CH Name>
DVRS Active Tones	If programmed, a short high-pitched 'DVRS Enabled' tone is repeated every few seconds (5-255 sec. programmable) in the MSU Speaker regardless of the Primary / Secondary Status of the VR.
DVRS Button Press	Short high-pitched tone. VR Control Mode is accessible.
MSU User PTTs the MSU Microphone	Both VR and MSU key up. VR may be programmed not to key up!
MSU Receiving from System	VR repeats audio received by MSU to PSU Users of the designated VR Channel. Speaker Audio is present.
PSU Activity on DVR channel	PSU audio is repeated locally by VR as well as by the MSU to the System. MSU Speaker Audio is present if In-Car Monitor is enabled in the MSU.

Table 4 SYSTEM Mode Operation

## LOCAL Mode

ACTIVITY	LOCAL MODE ACTION
<b>Control Head Display</b>	VR LOC <DVR CH Name>
<b>DVRS Active Tones</b>	If programmed, a short high-pitched 'DVRS Enabled' tone is repeated every few seconds (5-255 sec. programmable) in the MSU Speaker regardless of the Primary / Secondary Status of the VR.
<b>DVRS Button Press</b>	Short high-pitched tone. VR Control Mode is accessible.
<b>MSU Receiving from System</b>	VR may be programmed to repeat audio received by MSU to the PSU Users over the VR Channel when the VR is idle. Speaker Audio is present.
<b>MSU User PTTs the MSU Microphone</b>	VR keys up. MSU may or may not key up depending on MSU programming.
<b>PSU Activity on DVR channel</b>	PSU audio is repeated locally by VR. Speaker Audio is present if In-Car Monitor is enabled in the MSU.

Table 5 LOCAL Mode Operation

### **NOTE:**

If the selected VR channel attribute is programmed as Simplex, the local voice repeat VR function is not available. If proxying and In-Car Monitor are enabled and the TG selected by the local PSU is different from that selected on the MSU, then Inbound or Outbound speaker audio will depend on the MSU ICM setting ('ICM Selected' or 'ICM All') as well as the ICM trigger as described in the **In Car Monitor** section of this document.

## Selecting VR Mode and Channel

When a 'DVRs Enabled' TG / Channel is selected on the MSU, the user may enter the 'DVRs Control Mode' by pressing the DVRs button on the control head and change the VR Mode / Channel if such selection is enabled by the VR programming.

The VR mode and channel may be programmed to be 'Strapped' to the specific MSU TG/Channel. In this case, selecting a specific MSU TG / Channel on the control head would automatically force the VR to revert to a pre-programmed VR Mode and/or Channel. *For example, selecting a 'DVRs Enabled' TG named 'DISPATCH' on the MSU may automatically force the VR to switch to VR Channel 1, SYSTEM Mode.*

### **NOTE:**

Depending on the specific VR personality programming, the VR channel selection may be restricted to a short list of allowed VR channels (or no channel selection options at all). If Channel Strapping is enabled then the VR will always land on the specified Strapped VR channel first even when more than one channel is on its allowed channels list.

## Activating the VR via the MSU Control Head

The VR mode of operation and status can be changed from the 'DVRs' button as programmed in the APX MSU. The VR channel can be controlled by pressing the 'DVRs' Button and subsequently pressing the up / down navigation keys to scroll through the available channel selection.

## Automatic VR Activation (AVRA)

The VR can be activated automatically (switched from OFF or LOCAL to SYSTEM Mode) if one of the VIP inputs on the MSU control head is wired to the desired trigger source – portable charger switch or door switch or custom manual switch. When AVRA is enabled in the VR, the user still has the option of manually changing the VR mode from the MSU Control Head or remotely.

The AVRA feature depends on the VR programming as shown below:

AVRA Configuration (as programmed in VR)	System Mode Allowed	VIP Input	Current VR Mode	New VR mode
Activation / Deactivation	True	Asserted	OFF	SYSTEM
Activation / Deactivation	False	Asserted	OFF	LOCAL
Activation / Deactivation	True	Asserted	LOCAL	SYSTEM
Activation / Deactivation	False	Asserted	LOCAL	LOCAL
Activation / Deactivation	True	Asserted	SYSTEM	SYSTEM
Activation / Deactivation	True/False	De-asserted	ANY	OFF
Activation Only	True	Asserted	OFF	SYSTEM
Activation Only	False	Asserted	OFF	LOCAL
Activation Only	True	Asserted	LOCAL	SYSTEM
Activation Only	False	Asserted	LOCAL	LOCAL
Activation Only	True	Asserted	SYSTEM	SYSTEM
Activation Only	True/False	De-asserted	ANY	NO CHANGE
Toggle	True	Asserted 1 <sup>st</sup>	OFF	SYSTEM
Toggle	False	Asserted 1 <sup>st</sup>	OFF	LOCAL
Toggle	True/False	Asserted 2 <sup>nd</sup>	LOCAL	OFF
Toggle	True	Asserted 2 <sup>nd</sup>	SYSTEM	OFF
Toggle	True/False	De-asserted	ANY	NO CHANGE

Table 6 AVRA Functionality

### **IMPORTANT!**

The VR can be activated via AVRA only if a 'DVRs Enabled' TG / Channel is selected on the MSU.



## GPS DRIVEN DEACTIVATION

*Feature License – GPS Driven Deactivation required to enable this feature.<sup>4</sup>*

A VR must always be deactivated (switched to OFF mode) before driving to/away from an incident- driving with the VR activated (in SYSTEM or LOCAL mode) may cause interference at ongoing incidents. Users may find it desirable to have a VR automatically deactivate when it is known that the unit is moving or has moved. One way this can be accomplished is by utilizing the GPS functionality present in the MSU. If a GPS receiver is present in the MSU, and its use is licensed appropriately in the MSU and VR, then the VR can make use of the GPS receiver to trigger the change of the VR's mode to OFF.

Through configuration parameters, the VR can be set up to automatically change its mode to OFF in one of the following situations:

- Speed Only: VR has exceeded a configured speed threshold
- Distance Only: VR has travelled beyond a configured distance threshold
- Speed or Distance: VR has exceeded a configured Speed threshold OR a configured Distance threshold
- Speed and Distance: VR has simultaneously exceeded configured speed AND distance thresholds

**Starting Location:** The VR's starting location is set to be the location at which the VR becomes active (placed into LOCAL or SYSTEM mode). To establish an accurate location fix, this starting location is determined when the speed reaches 5 miles per hour.

**Audible Notification:** A configurable setting exists to determine whether a GPS Driven Deactivation of the VR generates a notification tone to the user via the MSU speaker.

**Feature Combinations:** In addition, this feature may work in conjunction with the AVRA feature to automatically provide VR mode changes. There are three possible combinations:

- 1) AVRA Activate with GPS Deactivate
- 2) AVRA Activate with AVRA or GPS Deactivate
- 3) AVRA Activate with AVRA followed by GPS Deactivate

---

<sup>4</sup> See firmware version & options requirement in Compatibility Chart (Futurecom website > Support > Documentation and Software > DVR-LX/DVR/VRX1000 > Compatibility Chart)

- GPS Timeout option available

**Primary / Secondary Preference:** When two Primary VRs are within range of each other, one VR will remain Primary and one will become Secondary. Any PSUs that were previously communicating through the Secondary VR must now switch over to the winning Primary unit. This switch of PSUs from one VR to another results in a temporary loss of communication. To minimize the disruption at an ongoing scene, the user is able to configure a preference so that a stationary Primary VR will remain Primary when a moving Primary VR comes within range.

Enabling the GPS Driven Deactivation feature means that a moving Primary VR may come in range of a stationary Primary VR. If it is determined that this scenario should not be left to the random selection of which VR remains Primary, the user has the option to configure a preference for Stationary VRs. The result is a Stationary VR will remain Primary and a moving VR will become Secondary thus minimizing disruption at the scene of the stationary VR.

## USE CASES

Each of the combinations of the GPS Driven Deactivation and AVRA features may involve any of the four GPS Driven Deactivation methods, resulting in a number of different scenarios. This provides a lot of flexibility for each customer to find the scenario that works best for their operating procedures. The tables below identify each of the scenarios and potential use cases for each.

GPS DEACTIVATION TYPE	USE CASE
Speed Only	A user desires the VR to remain active and maintain communication when driving slowly at an incident. When the configured speed threshold is exceeded, the VR will assume the vehicle is leaving the incident and will deactivate.
Distance Only	A user desires the VR to remain active and maintain communication when driving within a certain distance of an incident. When the configured distance threshold is exceeded, the VR will assume the vehicle is leaving the incident and will deactivate.
Speed or Distance	A user desires the VR to remain active and maintain communication when driving around at an incident. When either the configured speed or distance threshold is exceeded, the VR will assume the vehicle is leaving the incident and will deactivate. This would prevent a vehicle from driving away from an incident slowly (under the speed threshold) without ever deactivating the VR.
Speed and Distance	A user desires the VR to remain active and maintain communication when driving around at an incident. When the configured speed and distance thresholds are exceeded at the same time, the VR will assume the vehicle is leaving the incident and will deactivate. This would allow a vehicle to temporarily exceed the speed or distance thresholds without deactivating the VR.

SCENARIO	USE CASE
GPS Deactivate Only	A user desires the VR to automatically deactivate when the vehicle leaves an incident but has chosen not to install AVRA.
AVRA Activate with GPS Deactivate	A user desires the VR to automatically activate by a pre-defined action such as opening driver's door (AVRA) and automatically deactivate when the vehicle leaves an incident (GPS).
AVRA Activate with AVRA or GPS Deactivate	A user desires the VR to automatically activate by a pre-defined action such as opening driver's door (AVRA) and automatically deactivate when the vehicle leaves an incident. The automatic deactivation is driven by a pre-defined action such as insertion of the user's PSU into the vehicle's charger (AVRA) OR when the vehicle leaves an incident (GPS). It may be known that users do not always put their radios into the charger immediately (might just throw it on the seat), so this OR configuration provides complimentary (AVRA/GPS) means of determining that a user is leaving the incident.
AVRA Activate with AVRA followed by GPS Deactivate	A user desires the VR to automatically activate by a pre-defined action such as opening driver's door (AVRA) and automatically deactivate when the vehicle leaves an incident. The automatic deactivation will only occur when a pre-defined action occurs such as putting the car in Drive (AVRA) followed by driving a certain speed or distance away (GPS). This allows the user to get into the car and drive a short distance without deactivating the VR, thus allowing for repositioning of a vehicle at the incident with no break in communication. There is also a GPS Timeout option available that will deactivate the VR by an AVRA action alone when GPS is not available for a programmable amount of time. This option can be useful if operating in an environment where GPS is less reliable (e.g., common use in tunnels, parking garages, or urban canyons). In these situations, users may wish to allow some extended time before giving up on GPS confirmation of movement.

**NOTE:** If any of the conditions for deactivation are not met, the repeater will remain active regardless of GPS thresholds. Refer to the table below for more details.

Configuration for Deactivation	Condition(s) to be Met	Example of When Repeater Remains Active Regardless of GPS Thresholds
GPS Deactivate Only	<ul style="list-style-type: none"> <li>GPS signal available</li> <li>GPS threshold exceeded</li> </ul>	GPS signal is not available
AVRA or GPS Deactivate	<ul style="list-style-type: none"> <li>GPS signal available</li> <li>GPS threshold exceeded</li> </ul>	GPS signal is not available
	OR	AND
	<ul style="list-style-type: none"> <li>AVRA (going into drive, portable in charger, etc)</li> </ul>	User reactivates repeater after AVRA deactivates
AVRA followed by GPS Deactivate	<ul style="list-style-type: none"> <li>AVRA (going into drive, portable in charger, etc) FOLLOWED BY</li> <li>GPS threshold exceeded OR if GPS signal not available, GPS Timeout timer expires</li> </ul>	User reactivates repeater after AVRA deactivates

## EMERGENCY HANDLING

**GPS Deactivate Only:** When the specified GPS threshold(s) are reached, VR switches its mode to OFF unless VR is actively handling an Emergency. If an Emergency is in effect, then GPS Driven Deactivation of the VR is blocked; VR resets its location at the end of the Emergency and then resumes awaiting the GPS threshold(s) to be met.

**AVRA Activate with GPS Deactivate:** If an Emergency is in effect, then GPS Driven Deactivation is blocked; VR waits until the Emergency has ended or for a new AVRA Activate trigger or for user to initiate a VR keypad action, at which time VR resets its GPS location and resumes awaiting the GPS threshold(s) to be met.

**AVRA Activate with AVRA or GPS Deactivate:** If an Emergency is in effect, then AVRA/GPS Driven Deactivation is blocked; VR waits for the Emergency to end before taking further action. Notable interactions with Emergency include:

- If AVRA Activate trigger occurs during the Emergency, VR remains active and resets its GPS starting location.
- If the Emergency ends due to user pressing DVRS button on control head, then VR remains active and resets its GPS starting location.
- If the Emergency ends due to all PSUs exiting Emergency or due to VR's Emergency Timeout timer and the AVRA Deactivate trigger is still asserted, then the prior AVRA Deactivate trigger which was blocked by the Emergency is considered valid and VR deactivates (sets its mode to OFF).

NOTE: If only GPS threshold was exceeded before or during the Emergency, once the Emergency ends, the VR remains active and the GPS starting location is reset.

**AVRA Activate with AVRA followed by GPS Deactivate:** If an Emergency is in effect, then AVRA/GPS driven deactivation is blocked; VR waits for the Emergency to end before taking further action. Notable interactions with Emergency include:

- If AVRA Activate trigger occurs during the Emergency, VR remains active and resets its GPS starting location.
- If the Emergency ends due to user pressing DVRS button on control head, then VR remains active and resets its GPS starting location.
- If the Emergency ends due to all PSUs exiting Emergency or due to VR's Emergency Timeout timer and the AVRA Deactivate trigger is still asserted, then the prior "AVRA followed by GPS" event which was blocked by the Emergency is considered valid, and VR deactivates (sets its mode to OFF).

## Remote Activation of the VR

### Via Call Alert (Page) to VR

**NOTE:**

This feature requires the use of a P25 PSU and implies Digital or Forced Analog VR Mode of operation.

To remotely activate a VR, the PSU user can send a Call Alert (Page) with the ID of the specific VR. Upon receipt of a Call Alert (Page) from the PSU the VR will (in Classic or Flexible Operation, depending on programming):

#### Classic Operation

- Switch from OFF or LOCAL mode to SYSTEM mode (unless it is already in the SYSTEM mode). If the selected VR / MSU channel is programmed as LOCAL only, the VR will switch from OFF to LOCAL mode.
- Force the MSU to revert to a TG selected (if programmed).
- Switch to Primary Status and force any other Primary VR to become a Secondary unless there is a Permanent Primary (on the same VR channel) already present in the same area.
- Recommended for Vehicular Deployment use

#### Flexible Operation

- Cycle through a pre-configured set of modes (OFF, LOCAL, SYSTEM). Each subsequent Call Alert moving the VR to a new mode.
  - If the selected VR / MSU channel is programmed as LOCAL/SYSTEM only, modes cycling will adhere to this constraint.
- Force the MSU to revert to a TG selected & corresponding pre-programmed mode (if programmed).
- Switch to Primary Status and force any other Primary VR to become a Secondary unless there is a Permanent Primary (on the same VR channel) already present in the same area.
- Recommend for Fixed Location Deployment use

### Via PSU Emergency Alarm

The VR switches from OFF to SYSTEM mode after a programmable number of Emergency Alarm attempts sent by a PSU are successfully received by the VR and are not serviced by another (Primary) DVRS.

### Via PSU DTMF Tones

To remotely activate a VR (Analog Mode), the PSU user can send a preprogrammed DTMF sequence, which can be received by VR in the PSU radio coverage area. Upon receipt of the preprogrammed DTMF sequence from the PSU the VR will:

- Switch from OFF or LOCAL mode to SYSTEM mode.

- Switch to Primary Status unless there is already a Primary / Permanent Primary VR (on the same VR channel) already present in the same area.

DTMF Activation is supported on Analog or Mixed mode VR channels only.

### Via System / Dispatcher Call Alert Page to MSU

The dispatcher can send a Call Alert (Page) to a specific MSU ID, which in turn causes VR mode change in the following order: **OFF-SYS-LOC-OFF**.

The MSU can be programmed to support one of the following configurations:

- Call Alert / Remote Activation Disabled – the MSU does not respond to any Call Alert requests
- Call Alert Enabled – the MSU responds to Call Alerts addressed to its ID and does NOT initiate VR mode change
- Remote Activation Enabled – the MSU will acknowledge Call Alerts addressed to its ID and will initiate VR mode change provided the source ID of the Call Alert is programmed in the “VR Remote Activation IDs” table.

If “Generate Status on VR Mode Change” is enabled for a given DVRS Profile (in the APX MSU) , the MSU will send back a mode change status to indicate the current VR mode (OFF, SYSTEM, LOCAL). Only the Console Dispatcher can interpret those status messages:

DVR MODE	STATUS VALUE
OFF	1
LOCAL	2
SYSTEM	3

The dispatcher can't force a Non-Primary VR to become a Primary and can't activate a VR when a 'VR Disabled' mode is selected on the control head.

## **‘DVRs Enabled’ Mobile Radio TGs / Channels**

VR operation may be enabled (by the VR and MSU programming) on selected mobile radio Talk Groups / Channels and disabled on others.

When the user selects a **‘DVRs Enabled’** TG / Channel on the MSU control head, the VR operation is enabled in the following manner:

- The VR automatically enters the pre-programmed VR Mode/Channel associated (‘Strapped’) with the selected MSU TG / Channel if VR Strapped Operation is programmed in the VR.
- OR
- The user may change the VR Mode / Channel (if ‘strapping’ is not enabled) by pressing the assigned **DVRs** Button and entering the ‘VR Control Mode’.
  - The VR can be activated and used to repeat messages between the system users of the TG/Channel Selected on the MSU and the PSU users on the selected VR Channel.
  - If enabled in the VR personality, **‘DVRs Enabled’** tones will be heard every few seconds (5-255 sec. programmable) in the MSU speaker, regardless of the Primary / Secondary status.

## **‘DVRs Disabled’ Mobile Radio TGs / Channels**

VR operation may be enabled on selected Mobile Radio Talk Groups / Channels and disabled on others.

When the user selects a **‘DVRs Disabled’** TG / Channel on the control head:

- Pressing the DVRs button results in a VR Invalid Option Tone (single low-pitched tone).
- VR operation is prohibited i.e. all VR functions are disabled.
- Call Alert Page from the Local PSU, sent on the last used VR channel, can steer the MSU to a ‘VR Enabled’ mode if programmed accordingly.



## In Car Monitor (ICM)

The ICM feature allows the MSU to monitor PSU voice traffic and is configurable in the MSU codeplug as follows:

- ICM is enabled / disabled globally in the MSU via the 'ICM Allowed' field
- If 'ICM Allowed' is programmed in the MSU then ICM operation is further configured on a per MSU channel basis via the 'ICM Allowed' codeplug field.
- ICM functionality is further configured to be triggered by either HUB on / off transitions OR via Menu Item / Button on the MSU control head or keypad Mic.

When ICM functionality is configured to be triggered via HUB on/off then 'ICM Selected' operation takes place when the MSU microphone is placed on HUB, 'ICM All' operation will take place when the MSU microphone is taken off HUB.

For details on how to program the ICM functionality and options in the MSU, please refer to the corresponding Motorola documentation.

When the MSU is operating on a Trunking FNE with ICM enabled the following configurations are available:

- 'ICM Selected' – the MSU speaker unmutes to PSU audio matching its selected TG ID (digital VR channel) or all qualified analog PSU audio (analog VR channel).
- 'ICM All' – the MSU speaker unmutes to all PSU audio regardless of the TG ID (digital VR channel) or all analog PSU audio (analog VR channel).

When the MSU is operating on a conventional FNE with ICM enabled the following configurations are available:

- 'ICM Selected' and MSU configured for Selective Squelch – the MSU speaker will unmute only to PSU audio matching its selected TG (digital VR channels) or qualified analog audio (analog VR channels)
- 'ICM Selected' and MSU configured for Normal Squelch – the MSU speaker will unmute to any PSU TG audio (digital VR channels) or qualified analog PSU audio (analog VR channels).
- 'ICM All' – the MSU speaker unmutes to all PSU audio

Proxied Private Calls are never heard on the MSU speaker regardless of the Hang Up Box (HUB) status.

### **NOTE:**

Inbound Private calls to the MSU are not supported. Outbound Private Calls to the MSU are heard on the MSU Speaker.

## Primary / Secondary Operation Basics

See [Futurecom → Home → Support → Documentation and Software → White Papers → VR Introduction to Primary/Secondary Feature](#) for additional information

The VR has a built-in simulcast prevention mechanism, which prevents more than one VR to transmit on the same frequency, at the same time, in the same location.

### **NOTE:**

The algorithm is intended to operate in stationary, same scene scenarios only. It cannot be applied to moving vehicles. **Moving vehicles must either have the VR switched OFF or 'VR Disabled' MSU mode selected.**

### **Exception:**

With the application of a GPS Driven Deactivation feature license, a moving Primary VR within a limited range is possible. Refer to the **GPS DRIVEN DEACTIVATION** section for details on this feature.

The VRs are capable of communicating with each other and negotiating which VR is a Primary, i.e. elected to repeat, and which VRs are on Secondary for as long as there is a Primary.

The simulcast prevention algorithm has two phases:

- Primary / Secondary Phase
- Busy Lockout Phase

During the 'Primary / Secondary' phase, the VRs exchange P25 messages on their Rx frequency. When a VR is activated (switched to System or Local mode), it sends a query – "Is there a Primary?" If it receives a Primary (or Permanent Primary) 'Heart Beat', then the VR assumes Secondary state. If no Primary Heart Beat is received, the VR becomes the Primary and starts sending 'Primary Heart Beats' notifying other VRs of its status.

The 'Secondary' VRs monitor any VR-related activity while in a standby mode and execute Primary / Secondary checks periodically.





The 'Primary' VR services any communication requests in the area and 'communicates' its status to the other VRs periodically.

The Busy Lockout phase serves as an added protection by forcing the Primary VR not only to periodically communicate with the other VRs in the area (using its Rx frequency) but also to check for any activity on its Tx frequency prior to every repeat. To accommodate the dynamically changing "real life" environment, i.e. VRs arriving or leaving the scene at random time, VR channel / mode changes, Permanent Primary activation, Remote VR steering, etc., the Primary / Secondary algorithm has several built-in layers, configurable in the VR programmed personality.

The **Primary/Secondary Setup→Permanent Primary→Status** field is disabled by default and should be used only in special applications such as at remote, fixed VR installations, during testing or by selected public safety personnel.

The Primary / Secondary state of a VR is re-evaluated every time one of the following takes place:

- Change of VR Channel Frequency
- Change of VR Mode
- Remote Activation of another VR
- Selecting a VR Disabled TG / Channel on the O5
- Powering down a VR
- Detected presence or absence of another Primary/Permanent Primary
- User initiated change to Permanent Primary state

	PRIMARY	SECONDARY	PERMANENT PRIMARY	STANDBY PERMANENT PRIMARY
<b>DEFINITION</b>	An active VR which has won the Primary / Secondary negotiation. Responsible for handling communication at a scene.	An active VR which has lost Primary / Secondary negotiation.	An active VR with a higher priority than a Primary VR. Takes over communication at a scene and all other units become Secondary.	An active VR in Permanent Primary state which has lost Primary / Secondary negotiation.
<b>SELECTION</b>	Automatic	Automatic	Automatic or user initiated via configured button press.	Automatic
<b>DISPLAY</b>	<b>Steady</b> 	<b>Flashing</b> 	<b>Steady</b> 	<b>Flashing</b> 

**Table 7 Primary VR Definitions**

**NOTE:**

As an option, an external light may be placed on the top of the vehicle, which can be used to indicate which VR is the currently selected Primary.

## Permanent Primary Activation

Depending on the programming, there are two ways a VR may become a Permanent Primary:

- VR always operates as a Permanent Primary

OR

- VR may become Permanent Primary through a user initiated button press on the MSU control head

## Permanent Primary Deactivation

If programmed, a VR may leave the Permanent Primary state through a user initiated button press on the MSU control head.

## Legacy Mobexcom II Voting Compatibility Mode

The voting compatibility mode is applicable to analog VR mode only. If Legacy Mobexcom II Voting Compatibility mode is enabled in the VR, its voting algorithm is compatible with older style analog only Mobexcom II VRs. Enabling this feature allows seamless replacement of old style VRs with the new VR by supporting the deployment of both types of units in the same fleet during the transition period.

## Purchasable Software Options

VR is continually updated to provide more functionality and value. VR firmware, and Futurecom Repeater Configurator (FRC) are available for download at Futurecom's web site ([www.futurecom.com](http://www.futurecom.com)).

Certain capabilities of VR can be enabled by purchasing software options initially, or in the future as needs change (e.g. Authentication and Over-the-Air Programming Capability). Fielded units can activate these features after installing enablement keys provided by Futurecom. For information regarding activation of purchasable software options after initial product delivery please contact [sales@futurecom.com](mailto:sales@futurecom.com).

## Configuration Safeguarding

There are many configuration aspects of the VR that are specific to a user's detailed system deployment. Information such as the repeater's channel frequencies, access codes (PL/DPL/NAC), and RF thresholds may be sensitive, and desired to be kept private by the owner. To facilitate this, each VR can be password-protected by its administrator. VR units are shipped without a password, but a password can be easily set within each VR using the Futurecom Repeater Configurator (FRC). Once a VR has a password set, its configuration data is protected, and can only be read from or written to the VR by someone having that unit's password.

If template or DCD files are created by Futurecom Repeater Configurator for a VR, those files can be encrypted, and protected using a user-provided passphrase. These methods allow VR configuration parameters to remain private, even when a unit is left unattended, or shipped for service.

## RM-OTAP (Over The Air Programming)

The RM-OTAP feature enables operator to perform firmware and configuration update on each VR unit using Motorola Radio Management via the Mobile Radio. Configuration update can be saved as DCD file and then imported into Motorola Radio Management for later deployment.

In addition, this feature ensures automatic updating of firmware and configuration when VR is replaced in a DVRS installation. For more information on how to use the feature and which Mobile Radios support this functionality, please refer to the RM-OTAP User Guide on the Futurecom website.

**Feature License – RM-OTAP** required to enable this feature<sup>5</sup>.

## SmartConnect In-Vehicle Range Extension

This feature makes the DVRS compatible with the Motorola SmartConnect feature. The SmartConnect feature provides the ability of a portable to connect to the ASTRO System via the DVRS through LTE/SAT/Wifi.

Limitation will be

- PSU ID and TG are not proxied to the System for Inbound group calls, both regular and patched. The PSU ID and TG is translated to the MSU ID and TG.
  - During system call voice is repeated locally on the System Wide TG 0xFFFF.
  - Outbound group calls are repeated to the PSU on the System Wide TG 0xFFFF
- Private calls and packet data are blocked in system mode
- All proxy PSU initiated signaling features will be blocked except Emergency Alarm and Cancel Service

**Feature License – SmartConnect In-Vehicle Range Extension** required to enable this feature<sup>6</sup>.

---

<sup>5</sup> See firmware version requirement in Compatibility Chart (Futurecom website > Support > Documentation and Software > DVR-LX/DVR/VRX1000 > Compatibility Chart)

<sup>6</sup> See firmware version requirement in Compatibility Chart (Futurecom website > Support > Documentation and Software > DVR-LX/DVR/VRX1000 > Compatibility Chart)

## PSU Scan

The PSU Scan feature enables an enhanced PSU to support conventional scan feature while DVRS is configured as its system type. Affiliated PSU will be able to hear other radio traffic on other Trunking Talkgroups and on other conventional channels. The increased awareness of events in the area increases user's safety and enhances user's ability to react to events.

Configuration Notes:

- 1) Scan List configured through CPS that used for a DVRS Personality shall not be used / shared with a Conventional Personality (non-DVRS Personality)
- 2) All VR channels that will be used by PSUs with Conventional Scan feature need to have the corresponding Repeater Channel Setup→PSU Scan field set to "Yes".

***Feature License – PSU Conventional Scan*** required to enable this feature.<sup>7</sup>

Scan can be enabled or disabled for each VR channel using the Futurecom Repeater Configurator.

When Scan is enabled on the Conventional '**DVRS Enabled**' Portable some features are blocked by the scanning Portable.

The blocked features are:

- System status indication
  - FNE (System) Out of Range status display
  - VR Out of Range status display
  - Failsoft status display
  - Site Trunking status display
  - Imbalanced Coverage status display
  - Local Mode display
- Dynamic Regroup
- Location On PTT (LOPV)
- Private Call Decode
- Phone Call Decode
- Data Activity (e.g Context Activation, KMF commands)
- Hub Suspend (off hook) for Mobile
- Priority Channel Marking
- PSU Monitoring

---

<sup>7</sup> See firmware version & options requirement in Compatibility Chart (Futurecom website > Support > Documentation and Software > DVR-LX/DVR/VRX1000 > Compatibility Chart)

## MSU Scan

### Supported MSU Scan Types

The MSU Scan feature is allowed while the VR is active (System or Local Mode) if the MSU Scan type is configured as one of the following:

- Trunking Scan
- Conventional Scan
- Mixed Conventional Voting Scan
- Legacy Voting Scan
- Multi System Scan
- Priority Monitoring

The MSU does not support any other modes of scan operation, apart from those listed above, while the VR operates in SYSTEM or LOCAL mode. In such unsupported cases, the MSU will automatically suspend scan operation when the VR is set to SYSTEM or LOCAL mode of operation and resume it when the VR is OFF.

#### **NOTE:**

The LPSU calls will be repeated on the MSU Selected Channel.

### DVRS Enabled / Disabled Rules while MSU Scan is enabled

The Selected VR channel settings are used across all MSU scan channels except when the VR operation is Disabled for the given MSU channel.

If the VR selected channel is Digital and the MSU scans to an analog channel, the VR will become temporarily disabled.

If the Selected MSU channel is programmed as VR Disabled, the VR operation will remain disabled even if the MSU scans to a channel which is VR Enabled.

The VR will become temporarily disabled if the MSU lands on a channel that is programmed as VR Disabled. In this scenario the VR will not handle Outbound calls received by the MSU but will still repeat Inbound PSU calls by reverting the MSU to its selected channel.

### Outbound Calls (received by MSU from the FNE) with MSU Scan Enabled

If the MSU is configured to only unmute to a specific TG ID or NAC, only the audio containing the specified TG ID or NAC will be proxied by the VR to the PSU.

Individual call signaling (Page, Call Alert, Message, Radio inhibit etc.) originating from a secondary (not MSU selected) channel is not proxied by the VR to the PSU. Emergency Alarm / Call originating from a secondary channel are supported through the VR.

### **Inbound Calls (received by DVRS from PSU) with MSU Scan Enabled**

MSU Talkback and Designated TX are not supported when a PSU makes a call through the VR while the MSU has SCAN enabled. The MSU always moves back from the landed to the selected channel when the PSU initiates a call through the VR.

Talkback and Designated TX are supported only for MSU initiated calls.

### **MSU ISSI Roaming**

The NGI (New Generation Interoperability) feature and VR feature will be allowed such that a VR MSU enabled subscriber may also be enabled for InterWACN-Roaming in the subscriber codeplug. When the MSU roams to a foreign System the VR will display "VR Limited" to indicate to the user the limited functionality available.

When the MSU has roamed to the foreign system, the following features are not supported by the local PSU.

- Private Call
- Telephone Interconnect
- Call Alert
- Dynamic Regrouping
- Radio Check
- Multisystem Scan
- Selector Lock
- Status
- Message
- Remote Monitor
- Reprogram Request



## Unsupported PSU Features

The following PSU features are not presently supported by the VR or **DVRS Enabled** PSUs:

- Hearclear
- DTMF Hot Keypad
- Securenet
- Soft ID
- QCII
- Singletone
- Conventional OTAR
- Over-the-Air-Channel Reassignment (OTACR)
- Over-the-Air Channel Steering (OTACS)
- Over-the-Air Programming (OTAP)
- Priority Channel PTT
- PSU Reprogram request / Selector Lock
- PSU Smart PTT
- PSU Announcement Group operation
- PSU Phase II P25 conventional operation

### **NOTE:**

The unsupported PSU features list provided above may NOT include ALL unsupported features. Please contact Motorola for specific feature support information.

### **NOTE (for VRX1000):**

Due to FCC Exposure licensing limitations, when the User PTTs the MSU Microphone, only one of the transmitters is allowed to be keyed up (VRX1000 or MSU) as described in **Table 4** and **Table 5**.

## P25 Digital Mode Operation

This chapter provides details on the DVRS Digital P25 mode of operation.

The P25 Digital mode assumes the following:

- APX MSU Programmed for DVRS Operation
- P25 FDMA only mode is selected on the MSU
- P25 PSU programmed for DVRS operation (Local PSU)
- DVRS Enabled mode selected on the Local PSU
- VR channel is programmed in the VR for Digital (or Mixed) Mode of Operation

### NOTE:

The **Local PSU** notation throughout this chapter refers to a P25 PSU which is used to communicate with / through the VR.

'DVRS Enabled' type **Local PSU** refers to the models described in **DVRS: VR Compatible XTS/APX Portable Radios** when programmed for DVRS operation.

Some of the Digital mode DVRS features described are only available in P25 'DVRS Enabled' type PSUs and not available in Generic P25 PSUs (refer to **DVRS: VR Compatible XTS/APX Portable Radios** list).

A **System PSU** refers to a P25 PSU which has a P25 Mode (Trunking or Conventional) selected and communicates directly with the P25 Trunking or Conventional System, i.e. without a DVRS.

In in-band DVRS applications, the **Local** and **System PSUs** may be of the same model and personality. When a 'DVRS Enabled' P25 Mode is selected, the PSU is referred to as **Local PSU**. When a P25 System TG / Channel is selected, the PSU is referred to as **System PSU**.

In cross-band DVRS applications, the **Local PSUs** operate in different frequency band from the system infrastructure, i.e. from the **System PSUs**.

## PSU Affiliation

When a local PSU User selects a VR Enabled Mode, the local PSU is affiliated via an active primary VR if:

- The VR is programmed for digital (or mixed) mode on the selected VR channel.
- The same digital VR channel is selected on both the PSU and the VR.

Generic P25 PSU is registered during the first group call made after switching to the **DVRS Enabled** mode. '**DVRS Enabled**' P25 PSU starts automatic affiliation process upon selection of VR Enabled mode (no PTT required to start affiliation process).

### **IMPORTANT!**

The maximum number of PSUs that can get affiliated at a given time with one VR is 256.

## Group Calls

Inbound and Outbound Group Calls are supported by the DVRS.

## MSU Priorities

MSU Proxy Request Priority Level	Proxy Request
LOW	Idle (incl. in Emergency Call, not receiving audio) Group Voice Receive (all group call types, including hangtime while on trunked voice channel) Packet Data
MEDIUM	Transmitting Signaling features (call alert, status etc.) Individual Calls (unit to unit and Phone)
HIGH	Emergency Alarm Emergency Call Transmit Emergency Call Receive MSU Mode Change, Power Down

Table 8 MSU Proxy Request Priorities

## PSU Proxy Request Priorities

PSU Proxy Request Priority Level	Proxy Request
HIGH	Emergency Alarm Emergency Call
LOW	All other Proxy Requests

Table 9 PSU Proxy Request Priorities

## MSU Voice and Signaling Proxy Interactions

The MSU handles interactions with a PSU voice or signaling proxy request from the VR based on the following general priority rules:

- MSU Emergency overrides all proxies including PSU emergency alarm / emergency call.
- PSU Emergency overrides all MSU non-emergency proxies
- MSU PTT and signaling features (call alert, status etc) override all PSU non-emergency proxies
- PSU non-emergency proxies override MSU receive

## Talk Group Proxying

The Local PSU User can change the selected '**DVRS Enabled**' TG and seamlessly talk to the corresponding TG Users through the VR. The MSU can be on any '**DVRS Enabled**' Mode, which may or may not match the TG selected by the Local PSU. For example, if the Local PSU selects TG1 while the MSU is on TG2, the Local PSU can talk to Local TG1 users as well as System TG1 Users via the VR i.e. the MSU will be transmitting on TG1. If the MSU microphone is PTT-ed, both the MSU and the VR will transmit on the TG selected on the MSU i.e. TG2.

An outbound call received by the MSU on either TG1 or TG2 will be repeated by the VR to the Local PSUs.

**If Proxying is disabled, then the Local PSU and the MSU must have the same TG selected to enable Local PSU affiliation and communications.**

## Talk Group Translation

When TG translation is enabled in the VR for a specific PSU TG ID, then any call that is received by the VR from the Local PSU with this TG ID will be translated to the ID of the TG currently selected on the MSU's control head.

The Local PSU could be programmed with just one TG ID and if this ID is programmed in the VR TG Translation list, the PSU call will always be translated by the VR to the TG ID currently selected on the MSU control head.

For instance, if the Local PSU is on TG A, which is programmed in the VR TG Translation list and the MSU is on TG B then all inbound Local PSU calls will be repeated by the VR locally and to the System on TG B. If the MSU mode is then switched to TG C then the Local PSU calls will be repeated on TG C.

Generic (non-DVRS Enabled) Conventional P25 PSUs that are not enabled for Talkgroup operation will, by default, use TG ID 1 when transmitting. If TG ID 1 is added to the VR Translation table then PSUs transmitting TG ID 1 will be translated to the TG selected on the MSU.

### **IMPORTANT!**

**TG Translation requires that TG Proxying is enabled.**

When TG Proxying is enabled and the TG selected on the Local PSU is programmed in the VR Translation Table, the VR will affiliate the Local PSU on the TG that is selected on the MSU. If TG Proxying is enabled but the Local PSU is on a TG that is not in the VR TG Translation list then the VR will proxy any inbound / outbound calls on the PSU TG ID. Outbound call (system originated call) received on the currently selected MSU

TG is repeated 'as is' i.e. without any translation. Therefore, the Local PSUs need to be programmed with Normal Squelch (or NAC = F7E) to hear those calls.

## Private Calls

Private Calls or Selective Calls (Local to Local PSU; Local to System PSU; System to Local PSU) are supported on '**DVRS Enabled**' PSUs only. Generic P25 PSU mode does not support private calls via VR.

## PSU Talk Permit Tones

'Go Ahead' tones are generated in the '**DVRS Enabled**' PSUs. Different tones are generated to indicate if the VR is in LOCAL or SYSTEM mode or the call is P25 Encrypted.

As a programmable option LOCAL mode tones can be generated when the system is busy and only local repeat is available. Alternatively, the PSU user can get 'System Busy' tones and be forced to wait for system grant (see '**Digital System Setup Menu**' in the **VR Programming** section).

Generic P25 PSU mode does not support Talk Permit Tones when operating through the VR.

## Status Broadcast

If enabled by its programming, the VR transmits Status Broadcasts that can be received only by **P25 'DVRS Enabled'** PSUs:

- FNE Out of Range
- DVR Local only status
- Site Trunking
- IV&D Data Enabled / Disabled status

### **NOTE:**

Only a **Primary** VR can transmit Status Broadcasts.

The status indication is passed to the local PSU every time the status changes. If there is no change to the status, the VR sends status indication to the local PSUs at a preprogrammed time interval. The VR also sends a network status notification every time a local PSU is affiliated with the system via VR.

If the FNE enters Failsoft mode, the MSU proxies the Failsoft message (if failsoft is enabled in the MSU). The VR stops sending Status Broadcast to the local '**DVRS Enabled**' PSUs and periodically transmits Failsoft message instead.

The above indication is only available on **P25 'DVRS Enabled'** PSUs and is not available to Generic P25 PSUs.

### **NOTE:**

Status notification is not supported if the VRX1000 does not have P25 Enhanced Trunking Features Installed.

## Local Mode Indication

When the VR is operating in the Local Mode, the '**DVRS Enabled**' PSU User can see "**LOCAL ONLY**" message displayed on the PSU screen if status broadcast is enabled in the DVR as described in the 'Status Broadcast' paragraph. The above indication is only available on '**DVRS Enabled**' P25 PSUs and is not available to Generic P25 PSUs.

### **NOTE:**

Local Mode Indication is not supported if the VRX1000 does not have **P25 Enhanced Trunking Features** Installed.

## Radio Check / Inhibit

Radio Check and Radio Inhibit functions are passed through the VR to the Local PSU when the VR is in the SYSTEM or LOCAL mode. Those functions are available to both '**DVRS Enabled**' and Generic P25 PSUs when the MSU is operating on a P25 trunked or P25 conventional mode. If the MSU gets inhibited, the VR switches to 'VR Disabled' mode of operation.

## P25 Trunking OTAR

P25 Over The Air Rekeying (OTAR) is supported through the VR when the local PSUs are of the '**DVRS Enabled**' type, the VR is in the SYSTEM mode and the MSU is on a P25 Trunking mode. OTAR is not supported if Generic P25 PSUs are used and / or if the MSU is on a P25 conventional channel.

### **NOTE:**

P25 Trunking OTAR is supported on VRX1000 if P25 Enhanced Trunking Features is installed.

## Patch

When several TGs are patched on the system side (using the Trunking group-regrouping function), the VR ensures the patching is matched on the local PSU side when '**DVRS Enabled**' PSUs are used, the VR is in the SYSTEM or LOCAL mode and the MSU is on a P25 Trunking TG.

### **IMPORTANT!**

**System design must ensure that PSU TGs that are programmed for TG Translation are outside of the range of Talkgroups used on the Trunking system.**

MSU Patch is supported as follows:

- Inbound call from PSU on TG Translation enabled TG will be translated to the patch supergroup and repeated locally and to the system.
- Outbound call will be repeated as is (with the supergroup TG ID).

### **NOTE:**

Patch is not supported on 'Generic P25' PSUs or if the VRX1000 does not have **P25 Enhanced Trunking Features** Installed.

## Dynamic Regrouping

The Dynamic Regrouping feature allows a dispatcher to remotely redirect subscribers to operate on a designated TG without any intervention from the subscriber unit operator. This is done by remotely assigning a new TG for the subscriber to operate on. When the subscriber receives the request, it automatically switches to the assigned zone / channel. The VR extends this functionality to the **'DVRs Enabled'** local PSUs when the VR is in the SYSTEM or LOCAL mode and the MSU is operating on a P25 Trunked channel.

PSU Reprogram request (PSU requesting to be dynamically regrouped or ungrouped) and Selector Lock / Unlock (disabling / enabling the zone/channel selection functionality while a PSU is dynamically regrouped) are not presently supported via the VR.

### NOTE:

Dynamic Regrouping is not supported on Generic P25 PSUs or if the VX1000 does not have Option **P25 Enhanced Trunking Features** installed.

## Phone Interconnect

Phone Interconnect is supported on local P25 **'DVRs Enabled'** PSU when the VR is on a full duplex P25 channel (digital or mixed mode) and the MSU is on a P25 Trunked mode. Phone Interconnect requires the VR to be in the SYSTEM or LOCAL mode.

Phone Interconnect is only supported on **'DVRs Enabled'** P25 PSUs and is not available to Generic P25 PSUs.

### NOTE:

Local PSU Phone Interconnect is not supported on the VRX1000.

## Adaptive Power Control

The VR can be programmed to send P25 messages to the Local PSUs to adjust their transmit power depending on the received signal strength from the VR and thereby to conserve the PSU battery. Enabling this feature is NOT recommended in applications where multiple PSUs are used with a single simplex mode VR since it will affect the PSU-to-PSU communications range.

### NOTE:

Adaptive Power Control is supported on both 'Generic P25' PSUs as well as on **'DVRs Enabled'** PSUs.

## Digital Audio Buffering

Audio buffering is supported by the VR to eliminate loss of messages / parts of messages due to the inherent delays associated with acquiring system access. The Digital Audio Buffer in the VR is programmable up to 1800ms.

## P25 Encryption

The VR transparently passes the P25 encryption algorithms used by the subscriber and fixed network equipment. A transmission from a local portable would go through to the system with the MSU TG and the Encryption Key.

For example:

Local PSU: TG A, Encryption Key A

Repeater TG Translation Table List: TG A

MSU: TG B, Encryption Key B

Call from Local Portable will be proxied to the System with TG B, Encryption Key B

When the VR is on a P25 digital channel, inbound digital audio from a local PSU is handled according to the following table:

Local PSU Call	MSU Secure Strapping	Receiving Local PSUs	Receiving FNE
P25 Clear	Clear or Secure	P25 Clear	P25 Clear
P25 Encrypted	Clear or Secure	P25 Encrypted	P25 Encrypted

**Table 10 Inbound P25 Encryption Rules**

While the VR is on a digital channel, outbound digital audio originating from the FNE is handled according to the following table:

Call from FNE	MSU Secure Strapping	Receiving Local PSUs
P25 Clear	Clear or Secure	P25 Clear
P25 Encrypted	Clear or Secure	P25 Encrypted

**Table 11 Outbound P25 Encryption Rules**

While the VR is on a digital channel, outbound digital audio originating from the MSU is handled according to the following table:

MSU Mode	MSU Secure Strapping	Receiving Local PSUs
Digital P25	Clear	P25 Clear
Digital P25	Secure	P25 Encrypted

**Table 12 MSU MIC PTT P25 Encryption Rules**

The MSU interfaced to the VR will unmute to Inbound or Outbound Encrypted P25 calls ONLY if the MSU contains the key used for encryption in its Encryption Key List.

### **NOTE:**

In case of VRX1000, assuming it's in Local mode and programed to transmit / MSU not to transmit in Local mode.



## Remote VR Activation and Steering by PSU Call Alert (Page)

A P25 PSU may be programmed to send a Call Alert (Page) and preprogrammed Network ID (NAC) to a specific VR and thereby remotely change:

- VR Mode (from OFF or Local to System)
- VR Status (Secondary / Primary)
- Selected TG / Channel on MSU

### **NOTE:**

Remote change of MSU Mode has no effect on the operation of the rest of the PSUs in the area since the TG Proxying feature allows multiple TG operation. This applies to Mode change within the same system, and when TG Translation is not enabled

The VR is addressed by sending a call alert (page) with the specific programmed VR's ID.

### **NOTE:**

All VRs should have unique IDs programmed in the digital mode settings menu if the remote control feature is to be used. If no VR ID is programmed, the VR will assume the ID of the MSU currently interfaced to it. Remote activation and steering are supported when the MSU ID = VR ID.

The remote VR status change will not be successful if there is a Permanent Primary already present in the area.

## Emergency in Digital Mode

The **'DVRs Enabled'** P25 PSU can be programmed to block the launch of the Emergency feature if the P25 Trunking system is in Failsoft mode (when 'Emergency Blocked in Failsoft' is enabled).

The **'DVRs Enabled'** P25 PSU can be programmed to use the programmed 'Fallback Revert Talkgroup' while in Emergency and when on the dynamic Talkgroup channel without an assigned dynamic working group.

## Emergency Alarm

When an affiliated local PSU issues an emergency Alarm, the active Primary DVR will process the emergency to the system as follows:

- If the **'Display PSU Emergency ID'** box (in the VR **Emergency Setup**) is checked, the Local PSU Unit ID will be displayed on the MSU control head of the current Primary VR.
  - The PSU Unit ID will also appear on the display of the other local PSUs if they are programmed accordingly.
  - The local PSU ID during Emergency may also be displayed on the dispatcher console.
- Depending on its programming, the VR sends back an Emergency ACK to prevent the PSU from re-sending the Emergency either right after the VR decodes the Emergency request or after FNE/ Console ACK has been received
- All Secondary VRs in the area are monitoring the number of emergencies issued by Local PSUs according to the **'Attempts Timeout'** and **'Attempts Counter'** settings programmed in the VRs. If the number of detected but unserved Emergency Attempts exceeds the counter, the Secondary VRs will go through Primary / Secondary voting to select a new Primary that will process the Emergency Alarm to the FNE.
- If a VR is in the OFF Mode when it receives an Emergency Alarm from a local PSU, the VR will switch to System Mode after the **'Attempts Counter'** is exceeded, affiliate the PSU and process the Emergency to the system.
- If a VR is on a 'VR Disabled' Mode and it receives an Emergency from a local PSU with a valid steering NAC then after the **'Attempts Counter'** is exceeded, the DVRs will steer to the corresponding 'VR Enabled' MSU mode, switch to SYSTEM mode, affiliate the PSU and pass the Emergency to the System.

## Emergency Call

Emergency Call operation provides the user with access to a voice resource on a priority basis. The user's Emergency Call has priority over all other types of call traffic.

Upon receipt of an Emergency Call from a local PSU, the VR will process the call locally as well proxy the call to the FNE. The VR also updates Control Head display to indicate the PSUs Emergency Call condition. Upon PSU Cancellation of the Emergency Call, the

VR will clear its emergency display. The VR will also proxy the PSU emergency cancellation to the P25 FNE.

Emergency Hot MIC enables automatic emergency voice transmission without having to press the PSU PTT. PSU Emergency Hot Mic is supported only on '**DVRS Enabled**' PSUs. Only the '**DVRS Enabled**' PSU waits for Emergency Alarm ACK before requesting a voice channel. If Emergency Hot MIC is enabled in Generic P25 PSUs, the PSU will send emergency alarm and immediately enter the call phase, which prevents consistent emergency processing.

If the MSU interfaced to the VR is placed in Emergency Call, the VR will proxy the call to all Local PSUs that are in the VR proxy list.

### **Emergency Revert through VR**

The VR can be configured to revert local PSUs that have entered emergency by mode steering the MSU to a preconfigured zone/channel.

When the VR is programmed for emergency revert and the MSU is not already in Emergency, the VR steers the MSU to the preprogrammed zone/channel upon receiving and Emergency Alarm / Call from the PSU.

When the VR receives emergency cancellation from the PSU, it steers the MSU back to the original zone / channel, provided the MSU is not in emergency and the user has not manually changed the MSU channel.

### **Emergency Revert through PSU**

The PSU can be configured to revert to a preprogrammed talkgroup or zone / channel when it enters Emergency. With the Talkgroup revert option, the PSU does not change its mode but rather stays on the currently selected channel and performs all emergency related voice and signaling by using the Revert Talkgroup ID. Talkgroup revert is only supported on the APX '**DVRS Enabled**' PSUs.

### **Emergency operation during TG Translation**

Emergency operation is affected by TG Translation as follows:

- **Inbound Emergency Alarm** received by the VR on TG X will be translated and repeated locally on all translated TG IDs that are selected on local PSUs, which are currently affiliated with the VR. The Emergency Alarm is also translated to the ID of the TG selected on the MSU and forwarded to the system.
- **Outbound Emergency Alarm** received by the MSU on the MSU selected TG (TG Y) will be translated and repeated to the local PSUs on all translated TG IDs that are selected on Local PSUs (affiliated with the VR).
- **Inbound Emergency Call** on TG X will be translated by the VR to the ID of the TG selected on the MSU and will be repeated locally on the translated TG.
- **Outbound Emergency call** received on TG Y selected on the MSU will be repeated by the VR to the local PSUs on TG Y.

If Emergency Revert is programmed in the local PSU then:

- If the revert TG is on the VR TG Translation list, then the Emergency will be translated to the ID of the TG that is selected on the MSU. Emergency Alarm will be repeated locally on all Translation enabled TG IDs that are selected on Local PSUs (affiliated with the VR).
  - If the revert TG is not in the VR TG Translation list then the emergency will be proxied and the inbound, outbound and local repeat will be on the new emergency revert TG.
- If the MSU (interfaced to the Primary VR) is placed in Emergency and programmed to revert in Emergency then a subsequent Local PSU emergency will also be translated and declared on the MSU's emergency revert TG.

## Fireground (FG) Signaling

The Fireground deployment consists of a fleet of subscribers communicating with an Incident Commander position using digital signaling and either analog or digital voice.

If Fireground (FG) signaling is enabled in the local PSUs and on the selected full duplex VR channel, the VR repeats locally the FG messages received from the Local PSUs to the FG terminal. FG Emergency signaling received from the local PSU can be either repeated locally, sent to the system or both (as programmed in the VR).

### **NOTE:**

Only '**Generic P25**' PSUs support Fireground operation.

## PSU IV&D

The VR supports IV&D for only one PSU at any time. The use of PSU IV&D requires P25 '**DVRS Enabled**' PSUs, a VR in LOCAL or SYSTEM mode operating on a P25 digital or Forced Analog/Forced Analog All channel, and MSU operating on a P25 Trunked mode. Voice operation and signaling (such as call alert etc.) initiated from the MSU or PSU take priority over data operation.

## PSU Location Reporting

Location Reporting is supported on '**DVRS Enabled**' PSUs when the MSU is operating on a P25 Trunked mode. This feature relies on PSU IV&D functionality described above.

## PSU Call Alert

PSU call alert is supported via the VR when the MSU is operating on a P25 trunked or P25 conventional mode and when the PSU is either P25 **DVRS Enabled** or **P25 Generic**.

## PSU Message

The Message feature is supported on all types of P25 PSUs when the MSU is operating on a P25 Conventional mode only.

## PSU Status Update and Status Request

The PSU Status Update & Status Request features are supported on all types of P25 PSUs when the MSU is operating on a P25 Conventional or P25 Trunked mode.

## Automatic PSU Revert to Talk Around (TA)

The VR Enabled PSU can be programmed to automatically revert to TA if it goes outside of the VR radio coverage range. The PSU automatically reverts to normal full duplex operation as soon as it re-enters the VR radio coverage range. If using a simplex VR channel, the simplex PSU can be programmed to automatically revert to TA so that it can transmit even when the PSU is out of the range of the VR. This way, simplex PSU-to-PSU calls will be allowed regardless of the presence or absence of the VR

### NOTE:

VR Channel is automatically revert to TA in case of VRX1000

## PSU Group Services

Pre-requisites for PSU Group Services support via VR:

- APX series '**DVRS Enabled**' PSUs with Firmware R14.50.00 or later
- P25 Trunked FNE with firmware 7.16 or later
- VR with firmware R1.22 / MSU R14.50.00 or later
- VR in SYSTEM or LOCAL Mode, Digital Channel Selected
- MSU that VR is interfaced to receiving Group Services while on P25 Trunked **FDMA** Mode

The following Group Services can be supported by the VR:

### Group Text

Group text is an unconfirmed message that is sent to all members of a talkgroup. The VR passes the Group Text messages to the local PSUs. If the Local '**DVRS Enabled**' PSU users want to receive only Group Text Messages sent to the PSU selected Talkgroup, then the PSU must be programmed for 'Selective Squelch' instead of the default 'Normal Squelch'. If programmed for 'Normal Squelch', the Local PSU will receive all Group Text Messages proxied by the VR regardless of the Talkgroup currently selected on the PSU.

### NOTE:

The above also applies to voice calls in general – if the Local PSU users want their PSUs to only unmute to the PSU selected Talkgroup, then they need to program 'Selective Squelch' in the PSU. If they are using the default 'Normal Squelch' setting, the PSUs will unmute to all calls proxied by the VR regardless of the incoming call Talkgroup.

## Group Alias Update

Group Alias update is a message sent to a given TG while on a voice channel to alert the receiving radio of the transmitting radio's alias/ID configured in the Provisioning Manager on the console. The updated Group Alias data is received by the members of the TG and their Unified Call List (UCL) is updated. The VR passes the Group Alias Update to the Local '**DVRS Enabled**' PSUs so that their UCLs can get the update even while they are not directly connected to the trunked system but are proxied via the VR.

### **NOTE:**

The updated Alias will be displayed on the receiving PSU only when the PSU is directly affiliated on the Trunking system. When affiliated through the VR, the PSU will still display the Unit ID of the transmitting PSU but it will not display the programmed or the updated Alias for that transmitting Unit ID.

### **NOTE:**

When the MSU is operating on TDMA mode, the MSU may receive group services but will not proxy those to the VR / Local PSUs.

## Personnel Accountability

Personnel Accountability feature allows the user to respond to the group or individual evacuation command from the incident commander through FNE. When the subscriber receives the EVAC command, plays an alert and display, corresponding to the command type in the packet. The user presses PTT to stop playing alert and display and then sends back EVAC ACK to FNE through DVRS.

For feature compatibility with PSU types please refer to Table 1 DVRS Features (Motorola Infrastructure) vs Type of PSU.

### **NOTE:**

The evacuation command includes group and individual target and can be transmitted on control channel or working channel.

## VR PSU Authentication

The VR proxies the Authentication process to the '**DVRS Enabled**' LPSUs. It is recommended to disable BL; since due to the System Authentication timing, the VR may process messages/emergency alerts from a non-authenticated duplicate ID LPSU. When using remote activation of the VR via Call Alert/Page, it may take up to 10 seconds for the LPSU to be Authenticated.

**Feature License – Authentication** required to enable this feature.<sup>8</sup>

---

<sup>8</sup> See firmware version requirement in Compatibility Chart

## Encrypted PSU Data

This feature encrypts PSU Data, through the VR, while MSU is on a P25 trunked system. It offers VR users end to end security for their location information.

## NAC Linking

When two VRs are on a scene, they negotiate a Primary / Secondary relationship to avoid conflicts. (See Primary / Secondary Operation Basics).

One VR becomes the Primary unit and is responsible for all communications between the local PSUs and the system. In some situations, a single PSU is in range of multiple VRs where the VRs are located far enough apart from each other that they are both acting as Primary units. The purpose of the NAC Linking feature is to link a PSU with only one VR at a given time. Using the P25 NAC code, a PSU negotiates with available VRs and selects one Primary VR to connect to- ideally this is the closest. Only that VR sends communications between the PSU and the system. As a PSU moves out of range of its linked VR, it checks in the area for additional Primary VRs and then links to another available Primary unit. If no Primary VRs are within range, the PSU goes into Talkaround and communicates directly with other local PSUs. (refer to Motorola documentation regarding Talkaround feature)

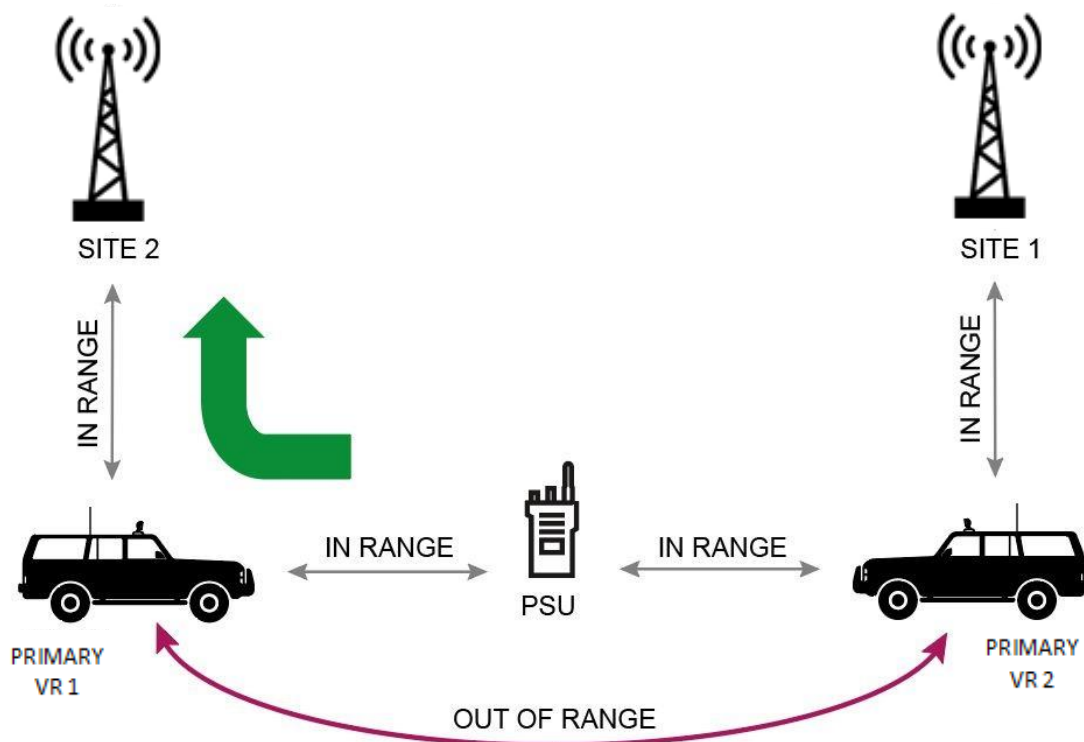


Figure 10: NAC Linking Feature

The NAC Linking feature is provided on a per VR channel basis. This provides versatility and allows the VR to be used by DVRS enabled portables on NAC Linking enabled channels and generic (non-DVRS enabled) portables on NAC Linking disabled channels.

Compatibility Mode automatically downgrades NAC Linking operation when presence of older, non-NAC linking capable PSUs are detected. Once downgraded, VR would handle both types of PSUs by using default/programmed Rx/Tx NACs. NAC Linking operation will automatically resume on subsequent VR activation (VR channel change, Mode change from Off to Local/System or power-up).

This separation of channels by portable type is also useful with shared DVRS units. For example, a shared rack-mount DVRS unit used to fill a coverage hole can be configured with different channels per agency and does not require all PSUs to be DVRS enabled portables that support the NAC Linking feature.

The NAC Linking feature should be used when operating on a P25 trunking system with digital VR channels (no other channel types supported).

The NAC Linking feature is not compatible with legacy PSUs (portables that do not support NAC Linking feature due to older firmware or disabling of the feature). Legacy PSUs must be used on a NAC Linking disabled VR channel.



## VR System Topologies

The following table provides an overview of all possible VR system configurations and whether each is supported. The rest of the document provides details on the supported system topologies.

PSU Type	VR Ch	System Configuration				
		System Type				
		Analog Conv.	P25 Conv.	Type II Trunking	P25 Trunking	P25 Trunking
		MSU Channel Type				
		Analog	Digital	Analog/Digital	Digital FDMA	Digital TDMA
<b>Analog</b>	Analog	Yes	Yes	Yes	Yes	Yes
	Digital	No	No	No	No	No
	Mixed	Yes	Yes	Yes	Yes	Yes
	Forced Analog	No	No	No	No	No
	Forced Analog All	No	No	No	No	No
<b>P25 Generic</b>	Analog	No	No	No	No	No
	Digital	No	Yes	No	Yes	No
	Mixed	No	Yes	No	Yes	No
	Forced Analog	No	No	No	No	No
	Forced Analog All	No	No	No	No	No
<b>P25 DVRS Enabled</b>	Analog	No	No	No	No	No
	Digital	No	Yes	No	Yes	Yes
	Mixed	No	Yes	No	Yes	Yes
	Forced Analog	Yes	Yes	Yes	Yes	Yes
	Forced Analog All	Yes	Yes	Yes	Yes	Yes

Table 13 VR System Topologies

### **Type II Trunking OR 3600 Baud System,**

- The mobile to site link in a 3600 system for the voice channel can be either analog or digital. The analog/digital selection is based on the configuration of the subscriber modulation map in the provisioning manager which sets up to 32 ranges separately for subscriber IDs and TGIDs.
- Type II digital voice is not compatible with the VR's P25 digital voice

## Digital Mode – Summary of Features

### Digital Channel Type on DVR/DVR-LX w P25 Trunking Mode Selected

The operation described below assumes a VR Digital mode conventional channel and P25 Talk Group are selected on the DVR/DVR-LX and MSU respectively.

FEATURE	DVR/DVR-LX OFF Mode	DVR/DVR-LX SYSTEM Mode	DVR/DVR-LX LOCAL Mode
Status Display on MSU CH	VR OFF <DVR CH>	VR SYS <DVR CH>	VR LOC <DVR CH>
PSU Affiliation	No	Yes	Yes
Talk Group Proxying / Translation	No	Yes	Yes
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	Yes	Yes
MSU Microphone PTT	Keys up MSU only	As programmed	As programmed
Inbound Group Call	No	Yes	Yes (Local Side)
Inbound Private Call	No	Yes	Yes
Inbound Call Alert	No	Yes	Yes
PSU Talk Permit Tones	No	Yes	Yes
PSU Emergency Alarm & Call	Yes (after activation)	Yes	Yes
PSU Emergency Revert	Yes (after activation)	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after activation)	Yes	Yes
PSU Remote VR Activation & Steering	Yes – Call Alert	Yes – Call Alert	Yes – Call Alert
Failsoft / Out of Range / Site Trunking Indication on PSU	No	Yes	No
PSU Local Mode Indication	No	No	Yes
Primary / Secondary Voting	No	Yes	Yes
VR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	Yes	Yes
PSU LOCATION	No	Yes	Yes
PSU P25 Trunking OTAR	No	Yes	Yes
PSU Patch	No	Yes	Yes
PSU Dynamic Regrouping	No	Yes	Yes
PSU Selector Lock /Unlock	No	No	No
PSU Phone Interconnect	No	Yes (FDX only)	Yes (FDX only)
PSU Adaptive Power Control	No	Yes	Yes
Audio Buffering	No	Yes	Yes
P25 Encryption	No	Yes	Yes
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
PSU Status / Message	No	Status only	Status only
PSU Group Services	No	Yes	Yes
PSU PTT ID	No	Yes	Yes
LOP(Location on PTT)	No	Yes	Yes
PSU Authentication	No	Yes	Yes

Table 14 Digital Channel Type on DVR/DVR-LX w P25 Trunking Mode Selected on MSU

## Digital Channel Type on VRX1000 (P25 Operation) & Generic P25 PSUs w P25 Trunked (FDMA) Mode Selected

When only **P25 Operation** option is enabled, in addition to all Analog mode features, the VRX1000 also supports basic P25 functionality with P25 Generic PSUs. **'DVRs Enabled'** PSUs are blocked and require **P25 Enhanced Trunking Features** option to be enabled through the VRX1000

FEATURE	VRX1000 OFF Mode	VRX1000 SYSTEM Mode	VRX1000 LOCAL Mode
PSU Affiliation	No	No	No
Talk Group Proxying / Translation	No	Yes	Yes
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU only	Keys up MSU only	As programmed <sup>9</sup>
Inbound Group Call	No	Yes	No
PSU PTT ID Pass Through	No	Yes	Yes
Inbound Private Call	No	No	No
Inbound Call Alert	No	Yes	Yes
PSU Talk Permit Tones	No	No	No
PSU Emergency Alarm	Yes (after activation)	Yes	Yes
PSU Emergency Revert	No	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after activation)	Yes	Yes
PSU Remote VR Activation & Steering	Yes – Call Alert	Yes – Call Alert	Yes – Call Alert
Failsoft / Out of Range / Site Trunking Indication on PSU	No	No	No
PSU Local Mode Indication	No	No	No
Primary / Secondary Voting	No	Yes	Yes
VR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	Yes	Yes
PSU LOCATION	No	No	No
PSU P25 Trunking OTAR	No	No	No
PSU Patch	No	No	No
PSU Dynamic Regrouping	No	No	No
PSU Selector Lock /Unlock	No	No	No
PSU Phone Interconnect	No	No	No
PSU Adaptive Power Control	No	No	No
Audio Buffering	No	Yes	NA
PSU P25 Encryption	No	Yes	Yes
PSU Scan	Yes	Yes	Yes
PSU Group Services			
PSU Announcement Group	No	No	No
PSU Status / Message	No	Status only	Status only
PSU Authentication			

Table 15 Digital Channel Type on VRX1000 (*P25 Operation*) & Generic P25 PSUs w P25 Trunked (FDMA) Mode Selected on MSU

<sup>9</sup> VRX1000 can be programmed so that MSU MIC PTT keys up either VRX1000 OR MSU side, but not both.

## Digital Channel Type on VRX1000 (P25 Enhanced Trunking Features) w P25 Trunked (FDMA) Mode Selected

When **P25 Enhanced Trunking Features** option is enabled on VRX1000 with ‘**DVRS Enabled**’ PSUs.

FEATURE	VRX1000 OFF Mode	VRX1000 SYSTEM Mode	VRX1000 LOCAL Mode
PSU Affiliation	No	Yes	Yes
Talk Group Proxying / Translation	No	Yes	Yes
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	Yes	Yes
MSU Microphone PTT	Keys up MSU only	Keys up MSU only	As programmed <sup>10</sup>
Inbound Group Call	No	Yes	No
PSU PTT ID Pass Through	No	Yes	Yes
Inbound Private Call	No	Yes	Yes
Inbound Call Alert	No	Yes	Yes
PSU Talk Permit Tones	No	Yes	Yes
PSU Emergency Alarm	Yes (after activation)	Yes	Yes
PSU Emergency Revert	No	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after activation)	Yes	Yes
PSU Remote VR Activation & Steering	Yes – Call Alert	Yes – Call Alert	Yes – Call Alert
Failsoft / Out of Range / Site Trunking Indication on PSU	No	Yes	No
PSU Local Mode Indication	No	No	Yes
Primary / Secondary Voting	No	Yes	Yes
VR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	Yes	Yes
PSU LOCATION	No	Yes	Yes
PSU P25 Trunking OTAR	No	Yes	Yes
PSU Patch	No	Yes	Yes
PSU Dynamic Regrouping	No	Yes	Yes
PSU Selector Lock /Unlock	No	No	No
PSU Phone Interconnect	No	No	No
PSU Adaptive Power Control	No	Yes	Yes
Audio Buffering	No	Yes	NA
PSU P25 Encryption	No	Yes	Yes
PSU Scan	Yes	Yes	Yes
PSU Group Services	No	Yes <sup>11</sup>	Yes <sup>11</sup>
PSU Announcement Group	No	No	No
PSU Status / Message	No	Status only	Status only
PSU Authentication	No	Yes	Yes

**Table 16 Digital Channel Type on VRX1000 (P25 Enhanced Trunking Features) w P25 Trunked (FDMA) Mode Selected on MSU**

<sup>10</sup> VRX1000 can be programmed so that MSU MIC PTT keys up either VRX1000 OR MSU side, but not both.

<sup>11</sup> Group services supported on APX Series ‘DVRS/VRX1000 Enabled’ PSUs

## Digital VR Mode with P25 Conventional Mode Selected on MSU

### Digital Channel Type on DVR/DVR-LX w P25 Conventional Mode Selected

The operation described below assumes a VR Digital mode conventional channel and P25 Conventional mode are selected on the DVR/DVR-LX and MSU respectively.

FEATURE	DVR/DVR-LX OFF Mode	DVR/DVR-LX SYSTEM Mode	DVR/DVR-LX LOCAL Mode
PSU Affiliation	No	Yes	Yes
Talk Group Proxying / Translation	No	Yes	Yes
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU only	As programmed	As programmed
Inbound Group Call	No	Yes	Yes (Local Side)
Inbound Private Call	No	No	No
Inbound Call Alert	No	Yes	Yes
PSU Talk Permit Tones	No	Yes	Yes
PSU Emergency Alarm & Call	Yes (after activation)	Yes	Yes
PSU Emergency Revert	Yes (after activation)	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after activation)	Yes	Yes
PSU Remote VR Activation & Steering	Yes – Call Alert	Yes – Call Alert	Yes – Call Alert
Failsoft / Out of Range / Site Trunking Indication on PSU	NA	NA	NA
PSU Local Mode Indication	No	No	Yes
Primary / Secondary Voting	No	Yes	Yes
VR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	Yes	Yes
PSU LOCATION	No	Yes	Yes
PSU P25 Trunking OTAR	NA	NA	NA
PSU Patch	NA	NA	NA
PSU Dynamic Regrouping	NA	NA	NA
PSU Selector Lock /Unlock	NA	NA	NA
PSU Phone Interconnect	NA	NA	NA
PSU Adaptive Power Control	No	Yes	Yes
Audio Buffering	No	Yes	Yes
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
P25 Encryption	No	Yes	Yes
PSU Status / Message	No	Yes	Yes
PSU PTT ID	No	Yes	Yes

Table 17 Digital Channel Type on DVR/DVR-LX w P25 Conventional Mode Selected on MSU

## Digital Channel Type on VRX1000 (P25 Operation) w P25 Conventional Mode Selected

When only **P25 Operation** option is enabled on VRX1000.

FEATURE	VRX1000 OFF Mode	VRX1000 SYSTEM Mode	VRX1000 LOCAL Mode
PSU Affiliation	No	Yes	Yes
Talk Group Proxying / Translation	No	Yes	Yes
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU only	Keys up MSU only	As programmed <sup>12</sup>
Inbound Group Call	No	Yes	Yes
PSU PTT ID Pass Through	No	Yes	Yes
Inbound Private Call	No	No	No
Inbound Call Alert	No	Yes	Yes
PSU Talk Permit Tones	No	Yes	Yes
PSU Emergency Alarm	Yes (after activation)	Yes	Yes
PSU Emergency Revert	No	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after activation)	Yes	Yes
PSU Remote VRX1000 Activation & Steering	Yes – Call Alert	Yes – Call Alert	Yes – Call Alert
Failsoft / Out of Range / Site Trunking Indication on PSU	NA	NA	NA
PSU Local Mode Indication	No	No	Yes
Primary / Secondary Voting	No	Yes	Yes
VRX1000 Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	Yes	Yes
PSU LOCATION	No	No	No
PSU P25 Trunking OTAR	NA	NA	NA
PSU Patch	NA	NA	NA
PSU Dynamic Regrouping	NA	NA	NA
PSU Selector Lock /Unlock	NA	NA	NA
PSU Phone Interconnect	NA	NA	NA
PSU Adaptive Power Control	No	Yes	Yes
Audio Buffering	No	Yes	NA
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
PSU P25 Encryption	No	Yes	Yes
PSU Status / Message	No	Yes	Yes

Table 18 Digital Channel Type on VRX1000 (P25 Operation) w P25 Conventional Mode Selected on MSU

<sup>12</sup> VRX1000 can be programmed so that MSU MIC PTT keys up either VRX1000 OR MSU side, but not both.

## Digital Channel Type on VRX1000 (P25 Enhanced Trunking Features) w P25 Conventional Mode Selected

When **P25 Enhanced Trunking Features** option is enabled on VRX1000 with ‘**DVRS Enabled**’ PSUs.

FEATURE	VRX1000 OFF Mode	VRX1000 SYSTEM Mode	VRX1000 LOCAL Mode
PSU Affiliation	No	Yes	Yes
Talk Group Proxying / Translation	No	Yes	Yes
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU only	Keys up MSU only	As programmed <sup>13</sup>
Inbound Group Call	No	Yes	Yes
PSU PTT ID Pass Through	No	Yes	Yes
Inbound Private Call	No	No	No
Inbound Call Alert	No	Yes	Yes
PSU Talk Permit Tones	No	Yes	Yes
PSU Emergency Alarm	Yes-after activation	Yes	Yes
PSU Emergency Revert	No	Yes	Yes
PSU Emerg. ID Pass Through	Yes-after activation	Yes	Yes
PSU Remote VR Activation & Steering	Yes – Call Alert	Yes – Call Alert	Yes – Call Alert
Failsoft / Out of Range / Site Trunking Indication on PSU	NA	NA	NA
PSU Local Mode Indication	No	No	Yes
Primary / Secondary Voting	No	Yes	Yes
VR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	Yes	Yes
PSU LOCATION	No	Yes	Yes
PSU P25 Trunking OTAR	NA	NA	NA
PSU Patch	NA	NA	NA
PSU Dynamic Regrouping	NA	NA	NA
PSU Selector Lock /Unlock	NA	NA	NA
PSU Phone Interconnect	NA	NA	NA
PSU Adaptive Power Control	No	Yes	Yes
Audio Buffering	No	Yes	NA
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
PSU P25 Encryption	No	Yes	Yes
PSU Status / Message	No	Yes	Yes

Table 19 Digital Channel Type on VRX1000 (P25 Enhanced Trunking Features) w P25 Conventional Mode Selected on MSU

<sup>13</sup> VRX1000 can be programmed so that MSU MIC PTT keys up either VRX1000 OR MSU side, but not both.

## Forced Analog Channel Type

**PREREQUISITE:** Forced Analog/Forced Analog All channel types are only available to Local PSUs which are '**DVRS ENABLED**'.

**Forced Analog** is a hybrid channel type where the signalling between the VR and the PSU is P25 digital, however, depending on the MSU channel selected, voice communications may be Analog or Digital. Based on the MSU channel, the following rules apply:

- when MSU is on an Analog Conventional or Type II Trunking voice channel
  - whether the call is analog or digital, the VR 'forces' the PSU to transmit analog voice
- when MSU is on a P25 voice channel, Conventional or Trunking
  - the VR and PSU operate in P25 digital mode for voice

**Forced Analog All** is similar to the Forced Analog channel type except that voice communications between the VR and PSU are always analog regardless of what channel type the MSU is on.

At all times, the signalling between the PSUs and the VR is P25 digital.

e.g.: Signalling  
Emergency  
Remote Activation

VR Channel Type	System Type	VR ↔ PSU Signalling	VR ↔ PSU Voice
<b>Forced Analog</b>	Analog Conv. or Type II Trunking (MSU Ch: Analog/Digital)	P25 Digital	Analog
	P25 Conv. or P25 Trunking	P25 Digital	P25 Digital
<b>Forced Analog All</b>	All	P25 Digital	Analog

**Table 20: Summary of System Type vs Signalling and Voice Communications**

For a list of supported PSU features, refer to the **Forced Analog Channel Type-Summary of Supported Features** tables.



## Forced Analog Channel Type – Summary of Supported Features

**NOTE:** VRX1000 support is based on the Tier 3 offering which includes P25 Enhanced Trunking Features.

### MSU/System Type: Conventional Analog

FEATURE	VR MODE: OFF	VR MODE: SYSTEM	VR MODE : LOCAL
PSU Affiliation	No	No	No
Talk Group Proxying / Translation	No	No	No
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU only	DVR-LX: As programmed VRX1000: Keys up MSU only	As programmed <sup>14</sup>
Inbound Group Call	No	Yes	DVR-LX: Yes-Local Side VRX1000: Yes
Inbound Private Call	No	No	No
Inbound Call Alert	No	No	DVR-LX: Yes-Local Side VRX1000: No
PSU Talk Permit Tones	No	Yes	Yes
PSU Emergency Alarm	Yes (after activation)	Yes	Yes
PSU Emergency Revert via DVRS	No	Yes	Yes
PSU Emerg. ID Pass Through	No	Yes	Yes
PSU Remote VR Activation & Steering	Yes – Call Alert	Yes – Call Alert	Yes – Call Alert
Failsoft / Out of Range / Site Trunking Indication on PSU	N/A	N/A	N/A
PSU Local Mode Indication	No	No	Yes
Primary / Secondary Voting	No	Yes	Yes
VR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	No	No
PSU LOCATION	No	Yes	Yes
PSU P25 Trunking OTAR	N/A	N/A	N/A
PSU Patch	N/A	N/A	N/A
PSU Dynamic Regrouping	N/A	N/A	N/A
PSU Selector Lock / Unlock	N/A	N/A	N/A
PSU Phone Interconnect	N/A	N/A	N/A
PSU Adaptive Power Control	No	No	No
Audio Buffering	No	Yes	DVR-LX: Yes VRX1000: N/A
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
P25 Encryption	No	Programmable	Programmable
PSU Status / Message	No	Yes	Yes
PSU PTT ID	No	Locally only	DVR-LX: Locally only VRX1000: No

Table 21 Forced Analog VR Channel Type with Conventional Analog MSU/System Type

<sup>14</sup> VRX1000 can be programmed so that MSU MIC PTT keys up either VRX1000 OR MSU side, but not both.

## MSU/System Type: Type II Trunked

FEATURE	VR MODE: OFF	VR MODE: SYSTEM	VR MODE : LOCAL
PSU Affiliation	No	No	No
Talk Group Proxying / Translation	No	No	No
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU only	As programmed	As programmed <sup>15</sup>
Inbound Group Call	No	Yes	Yes-Local Side
Inbound Private Call	No	No	No
Inbound Call Alert	No	No	DVR-LX: Yes-Local Side VRX1000: No
PSU Talk Permit Tones	No	Yes	Yes
PSU Emergency Alarm	Yes (after activation)	Yes	Yes
PSU Emergency Call	No	Yes (group call)	Yes (group call)
PSU Emergency Revert	No	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after activation)	Yes (with Emergency Alarm)	Yes (with Emergency Alarm)
PSU Remote VR Activation & Steering	Yes – Call Alert	Yes – Call Alert	Yes – Call Alert
Failsoft / Out of Range / Site Trunking Indication on PSU	No	DVR-LX: No VRX1000: Yes	DVR-LX: No VRX1000: Yes
PSU Local Mode Indication	No	No	Yes
Primary / Secondary Voting	No	Yes	Yes
VR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check /Inhibit	No	No	No
PSU LOCATION	No	No	No
PSU P25 Trunking OTAR	N/A	N/A	N/A
PSU Patch	No	No	No
PSU Dynamic Regrouping	No	No	No
PSU Selector Lock / Unlock	No	No	No
PSU Phone Interconnect	No	No	No
PSU Adaptive Power Control	No	No	No
Audio Buffering	No	Yes	DVR-LX: Yes VRX1000: N/A
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
P25 Encryption	No	No	DVR-LX: Programmable VRX1000: Yes <sup>16</sup>
PSU Status / Message	No	No	No
PSU PTT ID	DVR-LX: No VRX1000: N/A	DVR-LX: Locally only VRX1000: N/A	DVR-LX: Locally only VRX1000: N/A

Table 22 Forced Analog Channel Type with Type II Trunked MSU/System Type

<sup>15</sup> VRX1000 can be programmed so that MSU MIC PTT keys up either VRX1000 OR MSU side, but not both

<sup>16</sup> P25 Encryption supported in direct mode i.e. local PSU to local PSU; no ICM support

## MSU/System Type: P25 Trunking TDMA

FEATURE	VR MODE: OFF	VR MODE: SYSTEM	VR MODE : LOCAL
PSU Affiliation	No	Yes	Yes
Talk Group Proxying / Translation	No	Yes	Yes
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	Yes	Yes
MSU Microphone PTT	Keys up MSU only	As programmed	As programmed <sup>17</sup>
Inbound Group Call	No	Yes	Yes (Local Side)
Inbound Private Call	No	Yes	Yes
Inbound Call Alert	No	Yes	Yes
PSU Talk Permit Tones	No	Yes	Yes
PSU Emergency Alarm	Yes (after activation)	Yes	Yes
PSU Emergency Call	No	Yes (group call)	Yes (group call)
PSU Emergency Revert	No	Yes	Yes
PSU Emergency ID Pass Through	Yes (after activation)	Yes	Yes
PSU Remote VR Activation	Yes (Call Alert)	N/A	Yes (Call Alert)
MSU Mode Steering	No	Yes (Call Alert)	Yes (Call Alert)
Failsoft / Out of Range / Site Trunking Indication on PSU	No	Yes	Yes
PSU Local Mode Indication	No	DVR-LX: Yes VRX1000: No	Yes
Primary / Secondary Voting	No	Yes	Yes
VR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	Yes	Yes
PSU LOCATION	No	DVR-LX: Yes VRX1000: No	DVR-LX: Yes VRX1000: No
PSU P25 Trunking OTAR	N/A	DVR-LX: Yes VRX1000: N/A	DVR-LX: Yes VRX1000: N/A
PSU Patch	No	DVR-LX: Yes VRX1000: No	DVR-LX: Yes VRX1000: No
PSU Dynamic Regrouping	No	DVR-LX: Yes VRX1000: No	DVR-LX: Yes VRX1000: No
PSU Selector Lock /Unlock	No	No	No
PSU Phone Interconnect	No	DVR-LX: Yes VRX1000: No	DVR-LX: Yes VRX1000: No
PSU Adaptive Power Control	No	Yes	Yes
Audio Buffering	No	Yes	DVR-LX: Yes VRX1000: N/A
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
P25 Encryption	No	Yes	Yes <sup>18</sup>
PSU Status / Message	No	DVR-LX: Yes VRX1000: Status only	DVR-LX: Yes VRX1000: Status only
PSU PTT ID	No	Yes	Yes
PSU Authentication	No	Yes	Yes

\*PSU PTT ID is displayed on the FNE side (on system radios) but not on other local PSUs.

Table 23 Forced Analog Channel Type with P25 Trunking TDMA MSU/System Type

<sup>17</sup> VRX1000 can be programmed so MSU MIC PTT keys up either VRX1000 OR MSU side, but not both.

<sup>18</sup> P25 Encryption supported in direct mode i.e. local PSU to local PSU; no ICM support.

## Analog Mode Operation

This chapter provides details on the DVRS Analog mode of operation.

The Analog mode assumes the following:

- APX MSU Programmed for DVRS Operation.
- PSU programmed for DVRS operation using a Conventional, Analog, non-ASTRO Personality.
- VR channel used is programmed for Analog (or Mixed) mode of operation.

### VR Channel Setup for Analog Mode

To enable Analog VR operation on a specific VR channel the Channel Type (in the Repeater Channel Setup Menu) must be set to **Analog**.

The VR Tx / Rx Frequencies as well as the Tx / Rx PL or DPL must be programmed to match the corresponding PSU settings.

#### **NOTE:**

Mixed VR mode allows analog VR operation by switching between default digital and temporary analog modes as described in the Mixed VR Mode section. The use of mixed mode for analog VR communications is not recommended since it requires special user training due to the switching from digital to analog mode dynamics. Mixed VR mode should only be used when both analog and digital PSUs are required to operate on the same VR channel.

## Group Calls

Inbound PSU calls will be repeated on the MSU side over the currently selected MSU TG / Channel. Outbound calls received by the MSU are repeated to the local analog PSUs.

DVR / DVR-LX	VRX1000
An analog local PSU in VR mode can communicate with other analog local PSUs via an active Primary VR if all units are using the same radio channel (full duplex only) and using matching PL / DPLs.	An analog local PSU in VR mode can communicate with other analog local PSUs in Talk Around mode if all units are using the same simplex radio channel and matching PL / DPLs.

## Emergency in Analog Mode

The Emergency operation in analog mode is based on the type of signaling as selected in the Emergency Setup window. The recommended analog mode signaling type is MDC1200. Note that in addition to the VR programming, MDC1200 signaling must also be enabled in the local PSU personality. If MDC 1200 signaling is used, the Local PSU Emergency Alarm MDC ID will be passed through to the system provided the MDC ID is enabled (valid) on the system side.

### **NOTE:**

MDC PTT ID pass-through is not supported by VR on Type 2 Trunking MSU modes. Only MDC Emergency ID (with Emergency Alarm) pass-through is supported by the VR on Type 2 Trunking MSU modes.

### **NOTE:**

MDC ID offset. The VR will add a user programmable value/offset to the PSU MDC ID while proxying a call to a P25 Trunking system.

## Emergency Alarm

When an affiliated local PSU issues an Emergency Alarm, the active Primary VR will process the emergency to the system as follows:

- If the '**Display PSU Emergency ID**' box (in the VR **Emergency Setup**) is checked, the Local PSU Unit ID will be displayed on the MSU control head of the current Primary VR.
- The PSU Unit ID will also appear on the display of the other local PSUs if they are programmed accordingly.
- The local PSU ID during Emergency may also be displayed on the dispatcher console.
- The VR sends back an Emergency ACK to prevent the PSU from re-sending the Emergency either right after the VR decodes the Emergency request (if the '**System Acknowledge Type**' on the **Mobile Radio Channel Settings** menu is set to "**VR Ack**") or after FNE ACK has been received (if the '**System Acknowledge Type**' on the **Mobile Radio Channel Settings** menu is set to '**Site Ack**' or '**Console Ack**').
- All Secondary VRs in the area are monitoring the number of emergencies issued by local PSUs according to the '**Attempts Timeout**' and '**Attempts Counter**' settings programmed in the VRs **Emergency Setup**. If the number of detected not serviced Emergency Attempts exceeds the counter, the Secondary VRs will go through Primary / Secondary voting to select a new Primary to pass the emergency to the system.
- If a VR is in the OFF mode when it receives an Emergency from a local PSU, the VR will switch to SYSTEM mode after the '**Attempts Counter**' is exceeded, affiliate the PSU and pass the Emergency to the system.

The PSU Emergency attempts counter must be programmed to be equal to the VR '**Attempts Counter**' plus 3.

## Emergency Call

Emergency Call operation provides the user with access to a voice resource on a priority basis. The user's Emergency Call has priority over all other types of call traffic. Upon receipt of an Emergency Call from a local PSU, the VR will process the call locally as well as proxy the call to the FNE. On Type II Trunking systems, the PSU Emergency Call will be proxied with the **MSU Emergency ID**, NOT the PSU MDC ID. The VR also updates its display to indicate the PSUs Emergency Call condition.

## Emergency Revert through VR

The VR can be configured to revert the local PSUs that have entered emergency by mode steering the MSU to a preconfigured zone/channel. When the VR is programmed for emergency revert and the MSU is not already in Emergency, the VR steers the MSU to the preprogrammed zone/channel upon receiving an Emergency Alarm / Call from the PSU. The emergency revert condition can be configured as permanent or timed. If configured as timed then the VR will revert the MSU back to the original channel after the emergency inactivity timer expires without inbound or outbound activity.

## Analog Audio Buffering

Audio buffering is supported by the VR to eliminate loss of messages / parts of messages due to the inherent delays associated with acquiring system access. The analog buffer is programmable in the VR (up to 1300ms).

## Tactical Public Safety (TPS)

The Tactical Public Safety (TPS) feature allows analog subscribers to send digital PTT ID information on an analog channel with analog voice. TPS is only supported when the VR is on an analog channel in the SYSTEM mode and the MSU is configured for analog transmit (without any signaling) and with mixed receive.

## Fireground (FG) Signaling

The Fireground deployment consists of a fleet of subscribers communicating with an incident commander position using digital signaling and either analog or digital voice. Fireground (FG) Emergency signaling received from the local PSU can be either repeated locally, sent to the system, or both (as programmed in the VR).

### NOTE:

For DVR/DVR-LX:

If FG signaling is enabled in the local PSUs and on the selected full duplex VR channel, the DVR/DVR-LX repeats locally the FG messages received from the local PSUs to the FG terminal.

### NOTE:

Only Generic P25 PSUs support Fireground operation.

## Remote VR Activation via DTMF

The local PSU may be programmed to remotely activate the VR by switching it from OFF or LOCAL to SYSTEM mode by sending a pre-programmed DTMF sequence (refer to **Analog Setup** screen in Futurecom Repeater Configurator for VR programming instructions related to this feature).

The remote activation only works if the local PSU and the VR are set to operate on the same radio channel and there is no other Primary / Permanent Primary VR in the area operating on the same channel.

### NOTE:

The VR cannot be switched OFF remotely via DTMF.

## P25 Encryption in Analog Mode

If the MSU is receiving a P25 Encrypted call while the VR is operating on an analog channel, the VR can be programmed to do one of the following:

- Forward encrypted audio to the local PSUs
- Forward Clear audio to the local PSUs
- Send Warning Tones to the local PSUs and no audio

P25 Encrypted audio received by the MSU is processed by the VR as described below:

Call from FNE received by MSU	VR Programming for Outbound Encrypted Calls	VR Transmits to receiving Local PSUs
P25 Encrypted (FDMA)	Transmit Encrypted	P25 Encrypted <sup>19</sup>
P25 Encrypted	Transmit Clear	Clear Analog
P25 Encrypted	Send Warning Tones	Warning Tones

### IMPORTANT!

If the MSU is operating on a TDMA mode, the VR cannot transmit Encrypted Audio to the PSUs.

<sup>19</sup> Local PSUs must be configured for Mixed receive.

## Leading & Trailing Tones

The VR can be programmed to send over-the-air Leading or Trailing tones to the local PSUs to indicate successful MSU key up / system access.

If Leading Tones are enabled, the local PSU operation involves the following:

1. User does a quick PTT of local PSU so that MSU can request channel grant
2. User releases the PTT for a moment and waits to hear the Leading tones.
3. If the Leading tones indicate successful system access (channel grant), the local PSU user PTTs again and talks.
4. If the Leading tones indicate lack of channel grant, the LPSU user can try the call again.

Trailing tones are sent at the end of local PSU transmission and therefore do not require double PTT.

Both Leading and Trailing Tones are sent over-the-air (i.e. not generated in the PSU that initiates the call) therefore all local PSUs that are within the VR range and switch to the VR channel will hear the tones.

## Mobile Mode Steering via PL/DPL

This feature allows a PSU user to remotely change the currently selected MSU mode by transmitting with a pre-programmed PL/DPL. When the VR decodes the PL/DPL it finds the corresponding MSU mode in its look-up table and steers the MSU to the new mode. Depending on the programming, the MSU may either stay on the new mode or it may revert after a preprogrammed timer expires to the originally selected MSU mode.

The preprogrammed timer (**'MSU Mode Steering Hang Time', Analog Setup**) starts after the local PSU causing the steering keys off.

## Steering and Emergency

- If steering is disabled on the current VR channel, local PSU emergency is declared on the currently selected MSU channel (no steering).
- If steering is enabled on the current VR channel, the local PSU emergency is declared on the new (steered) MSU mode.
- When MSU is in emergency call state (**'Put DVR in Emergency Call State'** is enabled), the local PSU calls handling is defined by the **'Steering in Emergency'** programming for the specific VR channel. If **'Steering in Emergency'** is Disabled, the VR repeats any local PSU calls on the emergency channel (no steering occurs).
- If **'Steering in Emergency'** is enabled, the VR will steer and then key up the MSU. In this case the MSU will re-declare Emergency call on the new (steered to) channel.
- If **'Put DVR in Emergency Call State'** is Disabled (local PSU and MSU programmed for Emergency Alarm only), an inbound local PSU call initiated while the MSU is waiting for emergency ACK, should terminate MSU emergency and steer the MSU to the corresponding MSU mode/channel without re-declaring the emergency alarm on the new MSU channel.



## **MSU Operating on TDMA (P25, Phase 2)**

When the MSU is switched to a TDMA capable mode, the VR can operate in either Analog, Forced Analog, Forced Analog All or Digital mode.

For Forced Analog & Forced Analog All mode operation, please refer to the **Forced Analog & Forced Analog All Mode** section of this document.

When operating on TDMA system, any TDMA specific feature that can cause the MSU to interrupt an ongoing transmission will also affect the proxying of Local PSU transmissions to the system. The Local PSU will not receive an indication that its proxy transmission from the MSU to the system may have gotten interrupted.

## Analog Mode – Summary of Features

### Analog VR Mode with P25 Trunking Mode Selected on MSU

#### Analog Channel Type on DVR/DVR-LX with P25 Trunking Mode Selected

The operation described below assumes a VR Analog Mode channel and P25 Talk Group are selected on the DVR/DVR-LX and MSU respectively.

FEATURE	DVR/DVR-LX OFF Mode	DVR/DVR-LX SYSTEM Mode	DVR/DVR-LX LOCAL Mode
PSU Affiliation	No	MDC	MDC
Talk Group Proxying / Translation	No	No	No
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU only	As programmed	As programmed
Inbound Group Call	No	Yes	Yes (Local Side)
Inbound Private Call	No	No	No
Inbound Call Alert	No	No	No
PSU Leading/Trailing Tones	No	As Programmed	As Programmed
PSU Emergency Alarm	Yes (after activation)	Yes	Yes
PSU Emergency Call	No	Yes (group call)	Yes (group call)
PSU Emergency Revert	Yes (after activation)	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after activation)	Yes – MDC1200 with Emerg. Alarm	Yes – MDC1200 with Emerg. Alarm
PSU Remote VR Activation	Yes – DTMF	NA	Yes – DTMF
MSU Mode Steering	No	Yes (PL/DPL)	Yes (PL/DPL)
Failsoft / Out of Range / Site Trunking Indication on PSU	No	No	No
PSU Local Mode Indication	No	No	No
DVR Primary / Secondary Voting	No	Yes	Yes
DVR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	No	No
PSU LOCATION	No	No	No
PSU P25 Trunking OTAR	No	No	No
PSU Patch	No	No	No
PSU Dynamic Regrouping	No	No	No
PSU Selector Lock /Unlock	No	No	No
PSU Phone Interconnect	No	No	No
PSU Adaptive Power Control	No	No	No
Audio Buffering	No	Yes	Yes
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
P25 Encryption	No	Programmable	Programmable
PSU Status / Message	No	Yes Status only	Yes Status only
PSU PTT ID	No	Yes	Yes

Table 24 Analog Channel Type on DVR/DVR-LX with P25 Trunking Mode Selected on MSU

## Analog Channel Type on VRX1000 with P25 Trunking Mode Selected

FEATURE	VRX1000 OFF Mode	VRX1000 SYSTEM Mode	VRX1000 LOCAL Mode
PSU Affiliation	No	Yes	Yes
Talk Group Proxying / Translation	No	No	No
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU	Keys up MSU only	As programmed <sup>20</sup>
Inbound Group Call	No	Yes	No
PSU PTT ID Pass Through	No	Yes	Yes
Inbound Private Call	No	No	No
Inbound Call Alert	No	No	No
PSU Leading/Trailing Tones	No	As Programmed	As Programmed
PSU Emergency Alarm	Yes (after	Yes	Yes
PSU Emergency Call	No	Yes (group call)	Yes (group call)
PSU Emergency Revert	No	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after activation)	Yes – MDC1200 with Emerg. Alarm	Yes – MDC1200 with Emerg. Alarm
PSU Remote VR Activation	Yes – DTMF	NA	Yes – DTMF
MSU Mode Steering	No	Yes (PL/DPL)	Yes (PL/DPL)
Failsoft / Out of Range / Site Trunking Indication on PSU	No	No	No
PSU Local Mode Indication	No	No	No
Primary / Secondary Voting	No	Yes	Yes
VR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	No	No
PSU LOCATION	No	No	No
PSU P25 Trunking OTAR	No	No	No
PSU Patch	No	No	No
PSU Dynamic Regrouping	No	No	No
PSU Selector Lock /Unlock	No	No	No
PSU Phone Interconnect	No	No	No
PSU Adaptive Power Control	No	No	No
Audio Buffering	No	Yes	NA
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
PSU P25 Encryption	No	Yes (except Tier 1)	Yes (except Tier 1)
PSU Status / Message	No	Yes Status only	Yes Status only

Table 25 Analog Channel Type on VRX1000 with P25 Trunking Mode Selected on MSU

<sup>20</sup> VRX1000 can be programmed so that MSU MIC PTT keys up either VRX1000 OR MSU side, but not both.

## Analog VR Mode with P25 Conventional Mode Selected on MSU

### Analog Channel Type on DVR/DVR-LX with P25 Conventional Mode Selected

The operation described below assumes a VR Analog Mode channel and Conventional P25 Channel are selected on the DVR/DVR-LX and MSU respectively.

FEATURE	DVR/DVR-LX OFF Mode	DVR/DVR-LX SYSTEM Mode	DVR/DVR-LX LOCAL Mode
PSU Affiliation	No	No	No
Talk Group Proxying / Translation	No	No	No
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU only	As programmed	As programmed
Inbound Group Call	No	Yes	Yes (Local Side)
Inbound Private Call	No	No	No
Inbound Call Alert	No	No	No
PSU Leading / Trailing Tones	No	Yes	Yes
PSU Emergency Alarm	Yes (after activation)	Yes	Yes
PSU Emergency Revert	No	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after activation)	Yes – MDC1200 with Emerg. Alarm	Yes – MDC1200 with Emerg. Alarm
MSU Mode Steering	No	Yes (PL/DPL)	Yes (PL/DPL)
Failsoft / Out of Range / Site Trunking Indication on PSU	NA	NA	NA
PSU Local Mode Indication	No	No	No
Primary / Secondary Voting	No	Yes	Yes
VR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	No	No
PSU LOCATION	No	No	No
PSU P25 Trunking OTAR	NA	NA	NA
PSU Patch	NA	NA	NA
PSU Dynamic Regrouping	NA	NA	NA
PSU Selector Lock /Unlock	NA	NA	NA
PSU Phone Interconnect	No	No	No
PSU Adaptive Power Control	No	No	No
Audio Buffering	No	Yes	Yes
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
P25 Encryption	No	Programmable	Programmable
PSU Status / Message	No	Yes	Yes
PSU PTT ID	No	Yes	Yes

Table 26 Analog Channel Type on DVR/DVR-LX with P25 Conventional Mode Selected on MSU

### Analog Channel Type on VRX1000 with P25 Conventional Mode Selected

FEATURE	VRX1000 OFF Mode	VRX1000 SYSTEM Mode	VRX1000 LOCAL Mode
PSU Affiliation	No	No	No
Talk Group Proxying / Translation	No	No	No
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU only	Keys up MSU only	As programmed <sup>21</sup>
Inbound Group Call	No	Yes	No
PSU PTT ID Pass Through	No	Yes	Yes
Inbound Private Call	No	No	No
Inbound Call Alert	No	No	No
PSU Leading / Trailing Tones	No	Yes	Yes
PSU Emergency Alarm	Yes (after activation)	Yes	Yes
PSU Emergency Revert	No	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after MDC1200 activation)	Yes – MDC1200 Emerg. Alarm with	Yes – MDC1200 with Emerg. Alarm
PSU Remote VR Activation	Yes – DTMF	NA	Yes – DTMF
MSU Mode Steering	No	Yes (PL/DPL)	Yes (PL/DPL)
Failsoft / Out of Range / Site Trunking Indication on PSU	NA	NA	NA
PSU Local Mode Indication	No	No	No
Primary / Secondary Voting	No	Yes	Yes
VR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	No	No
PSU LOCATION	No	No	No
PSU P25 Trunking OTAR	NA	NA	NA
PSU Patch	NA	NA	NA
PSU Dynamic Regrouping	NA	NA	NA
PSU Selector Lock /Unlock	NA	NA	NA
PSU Phone Interconnect	No	No	No
PSU Adaptive Power Control	No	No	No
Audio Buffering	No	Yes	NA
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
PSU P25 Encryption	No	Yes (except Tier 1)	Yes (except Tier 1)
PSU Status / Message	No	Yes	Yes

Table 27 Analog Channel Type on VRX1000 with P25 Conventional Mode Selected on MSU

<sup>21</sup> VRX can be programmed so that MSU MIC PTT keys up either VRX1000 OR MSU side, but not both.

## Analog VR Mode with Conventional Analog Mode Selected on MSU

### Analog Channel Type on DVR/DVR-LX with Conventional Analog Mode Selected

The operation described below assumes a VR Analog Mode channel and Conventional Analog Channel are selected on the DVR/DVR-LX and MSU respectively.

FEATURE	DVR/DVR-LX OFF Mode	DVR/DVR-LX SYSTEM Mode	DVR/DVR-LX LOCAL Mode
PSU Affiliation	No	No	No
Talk Group Proxying / Translation	No	No	No
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU only	As programmed	As programmed
Inbound Group Call	No	Yes	Yes (Local Side)
Inbound Private Call	NA	NA	NA
Inbound Call Alert	No	No	No
PSU Leading / Trailing Tones	No	Yes	Yes
PSU Emergency Alarm	Yes (after activation)	Yes	Yes
PSU Emergency Revert	No	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after activation)	Yes	Yes
PSU Remote VR Activation	Yes – DTMF	NA	Yes – DTMF
MSU Mode Steering	No	Yes (PL/DPL)	Yes (PL/DPL)
Failsoft / Out of Range / Site Trunking Indication on PSU	NA	NA	NA
Local Mode Indication on PSU	No	No	No
Primary / Secondary Voting	Yes	Yes	Yes
VR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	No	No
PSU LOCATION	No	No	No
P25 Trunking OTAR	NA	NA	NA
PSU Patch	NA	NA	NA
PSU Dynamic Regrouping	NA	NA	NA
PSU Selector Lock / Unlock	NA	NA	NA
PSU Phone Interconnect	NA	NA	NA
PSU Adaptive Power Control	NA	NA	NA
Audio Buffering	No	Yes	Yes
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
P25 Encryption	No	No	Programmable
PSU Status / Message	No	Yes	Yes
PSU PTT ID	No	Yes	Yes

Table 28 Analog Channel Type on DVR/DVR-LX with Conventional Analog Mode Selected on MSU

## Analog Channel Type on VRX1000 with Conventional Analog Mode Selected

FEATURE	VRX OFF Mode	VRX SYSTEM Mode	VRX LOCAL Mode
PSU Affiliation	No	No	No
Talk Group Proxying / Translation	No	No	No
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU only	Keys up MSU only	As programmed <sup>22</sup>
Inbound Group Call	No	Yes	No
PSU PTT ID Pass Through	No	Yes	Yes
Inbound Private Call	NA	NA	NA
Inbound Call Alert	No	No	No
PSU Leading / Trailing Tones	No	Yes	Yes
PSU Emergency Alarm	Yes (after activation)	Yes	Yes
PSU Emergency Revert	No	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after MDC1200 activation)	Yes – MDC1200 with Emerg. Alarm	Yes – MDC1200 with Emerg. Alarm
PSU Remote VR Activation	Yes – DTMF	NA	Yes – DTMF
MSU Mode Steering	No	Yes (PL/DPL)	Yes (PL/DPL)
Failsoft / Out of Range / Site Trunking Indication on PSU	NA	NA	NA
Local Mode Indication on PSU	No	No	No
Primary / Secondary Voting	Yes	Yes	Yes
VR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	No	No
PSU LOCATION	No	No	No
P25 Trunking OTAR	NA	NA	NA
PSU Patch	NA	NA	NA
PSU Dynamic Regrouping	NA	NA	NA
PSU Selector Lock / Unlock	NA	NA	NA
PSU Phone Interconnect	NA	NA	NA
PSU Adaptive Power Control	NA	NA	NA
Audio Buffering	No	Yes	NA
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
PSU P25 Encryption	No	Yes (except Tier 1)	Yes (except Tier 1) <sup>23</sup>
PSU Status / Message	No	Yes	Yes

Table 29 Analog Channel Type on VRX1000 with Conventional Analog Mode Selected on MSU

<sup>22</sup> VRX1000 can be programmed so that MSU MIC PTT keys up either VRX1000 OR MSU side, but not both.

<sup>23</sup> VRX1000 Tier 1 means P25 Option and P25 Enhanced Trunking Features options are not enabled

## Analog VR Mode with 3600 Baud Analog or Digital Trunking Mode Selected on MSU

### Analog Channel Type on DVR/DVR-LX with 3600 Baud Analog or Digital Trunking Mode Selected

The operation described below assumes a VR Analog Mode channel and 3600 Baud Analog or Digital Trunking Mode are selected on the DVR/DVR-LX and MSU respectively.

FEATURE	DVR OFF Mode	DVR SYSTEM Mode	DVR LOCAL Mode
PSU Affiliation	No	No	No
Talk Group Proxying / Translation	No	No	No
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU only	As programmed	As programmed
Inbound Group Call	No	Yes	Yes (Local Side)
Inbound Private Call	No	No	No
Inbound Call Alert	No	No	No
PSU Leading / Trailing Tones	No	Yes	Yes
PSU Emergency Alarm	Yes (after activation)	Yes	Yes
PSU Emergency Call	No	Yes (group call, uses MSU ID and TG)	Yes (group call, uses MSU ID and TG)
PSU Emergency Revert	No	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after activation)	Yes – MDC1200 with Emerg. Alarm	Yes – MDC1200 with Emerg. Alarm
PSU Remote VR Activation	Yes – DTMF	NA	Yes – DTMF
MSU Mode Steering	No	Yes (PL/DPL)	Yes (PL/DPL)
Failsoft / Out of Range / Site Trunking Indication on PSU	No	No	No
PSU Local Mode Indication	No	No	No
DVR Primary / Secondary Voting	No	Yes	Yes
DVR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	No	No
PSU LOCATION	No	No	No
PSU P25 Trunking OTAR	NA	NA	NA
PSU Patch	No	No	No
PSU Dynamic Regrouping	No	No	No
PSU Selector Lock /Unlock	No	No	No
PSU Phone Interconnect	No	No	No
PSU Adaptive Power Control	No	No	No
Audio Buffering	No	Yes	Yes
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
P25 Encryption	No	No	Programmable
PSU Status / Message	No	No	No
PSU PTT ID	No	No	No

Table 30 Analog Channel Type on DVR/DVR-LX with 3600 Baud Analog or Digital Trunking Mode Selected on MSU



## Analog Channel Type on VRX1000 with 3600 Baud Analog or Digital Trunking Mode Selected

FEATURE	VRX1000 OFF Mode	VRX1000 SYSTEM Mode	VRX1000 LOCAL Mode
PSU Affiliation	No	No	No
Talk Group Proxying / Translation	No	No	No
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU only	Keys up MSU only	As programmed <sup>24</sup>
Inbound Group Call	No	Yes	Yes
PSU PTT ID Pass Through	No	No	No
Inbound Private Call	No	No	No
Inbound Call Alert	No	No	No
PSU Leading / Trailing Tones	No	Yes	Yes
PSU Emergency Alarm	Yes (after activation)	Yes	Yes
PSU Emergency Call	No	Yes (group call, using MSU unit ID and TG)	Yes (group call, using MSU unit ID and TG)
PSU Emergency Revert	No	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after MDC1200 activation)	Yes – MDC1200 with Emerg. Alarm	Yes – MDC1200 with Emerg. Alarm
PSU Remote VRX Activation	Yes – DTMF	NA	Yes – DTMF
MSU Mode Steering	No	Yes (PL/DPL)	Yes (PL/DPL)
Failsoft / Out of Range / Site Trunking Indication on PSU	No	No	No
PSU Local Mode Indication	No	No	No
Primary / Secondary Voting	No	Yes	Yes
VR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	No	No
PSU LOCATION	No	No	No
PSU P25 Trunking OTAR	NA	NA	NA
PSU Patch	No	No	No
PSU Dynamic Regrouping	No	No	No
PSU Selector Lock /Unlock	No	No	No
PSU Phone Interconnect	No	No	No
PSU Adaptive Power Control	No	No	No
Audio Buffering	No	Yes	NA
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
PSU P25 Encryption	No	No	Yes <sup>25</sup>
PSU Status / Message	No	No	No

Table 31 Analog Channel Type on VRX1000 with 3600 Baud Analog or Digital Trunking Mode Selected on MSU

<sup>24</sup> VRX1000 can be programmed so that MSU MIC PTT keys up either VRX1000 OR MSU side, but not both.

<sup>25</sup> P25 Encryption supported in direct mode i.e. local PSU to local PSU; no ICM support.

## **Analog VR Mode with P25 Phase II (TDMA) Trunking Mode Selected on MSU**

### **Analog Channel on DVR/DVR-LX with P25 Phase II (TDMA) Trunking Mode Selected**

The operation described below assumes a VR Analog Mode channel and Phase II TDMA 9600 Baud Trunking Mode are selected on the DVR/DVR-LX and MSU respectively.

FEATURE	DVR OFF Mode	DVR SYSTEM Mode	DVR LOCAL Mode
PSU Affiliation	No	No	No
Talk Group Proxying / Translation	No	No	No
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU only	As programmed	As programmed
Inbound Group Call	No	Yes	Yes (Local Side)
Inbound Private Call	No	No	No
Inbound Call Alert	No	No	No
PSU Leading / Trailing Tones	No	Yes	Yes
PSU Emergency Alarm	Yes (after activation)	Yes	Yes
PSU Emergency Call	No	Yes (group call)	Yes (group call)
PSU Emergency Revert	No	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after activation)	Yes – MDC1200 with Emerg. Alarm	Yes – MDC1200 with Emerg. Alarm
PSU Remote VR Activation	Yes – DTMF	NA	Yes – DTMF
MSU Mode Steering	No	Yes (PL/DPL)	Yes (PL/DPL)
Failsoft / Out of Range / Site Trunking Indication on PSU	No	No	No
PSU Local Mode Indication	No	No	No
DVR Primary / Secondary Voting	No	Yes	Yes
DVR Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	No	No
PSU LOCATION	No	No	No
PSU P25 Trunking OTAR	NA	NA	NA
PSU Patch	No	No	No
PSU Dynamic Regrouping	No	No	No
PSU Selector Lock /Unlock	No	No	No
PSU Phone Interconnect	No	No	No
PSU Adaptive Power Control	No	No	No
Audio Buffering	No	Yes	Yes
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
P25 Encryption	No	No	Programmable
PSU Status / Message	No	Status only	Status only
PSU PTT ID	No	Yes (MDC1200)	Yes (MDC1200)

**Table 32 Analog Channel on DVR/DVR-LX with P25 Phase II (TDMA) Trunking Mode Selected on MSU**

## Analog Channel on VRX1000 with P25 Phase II (TDMA) Trunking Mode Selected

FEATURE	VRX1000 OFF Mode	VRX1000 SYSTEM Mode	VRX1000 LOCAL Mode
PSU Affiliation	No	Yes	Yes
Talk Group Proxying / Translation	No	No	No
Outbound Group Call	No	Yes	Programmable
Outbound Private Call	No	No	No
MSU Microphone PTT	Keys up MSU only	Keys up MSU only	As programmed <sup>26</sup>
Inbound Group Call	No	Yes	Yes
PSU PTT ID	No	Yes (MDC1200)	Yes (MDC1200)
Inbound Private Call	No	No	No
Inbound Call Alert	No	No	No
PSU Leading / Trailing Tones	No	Yes	Yes
PSU Emergency Alarm	Yes (after activation)	Yes	Yes
PSU Emergency Call	No	Yes (group call)	Yes (group call)
PSU Emergency Revert via VRX	No	Yes	Yes
PSU Emerg. ID Pass Through	Yes (after MDC1200 activation)	Yes – MDC1200 with Emerg. Alarm	Yes – MDC1200 with Emerg. Alarm
PSU Remote VRX Activation	Yes – DTMF	NA	Yes – DTMF
MSU Mode Steering	No	Yes (PL/DPL)	Yes (PL/DPL)
Failsoft / Out of Range / Site Trunking Indication on PSU	No	No	No
PSU Local Mode Indication	No	No	No
Primary / Secondary Voting	No	Yes	Yes
VRX Tones – MSU Speaker	No	Yes	Yes
PSU Radio Check / Inhibit	No	No	No
PSU LOCATION	No	No	No
PSU P25 Trunking OTAR	NA	NA	NA
PSU Patch	No	No	No
PSU Dynamic Regrouping	No	No	No
PSU Selector Lock /Unlock	No	No	No
PSU Phone Interconnect	No	No	No
PSU Adaptive Power Control	No	No	No
Audio Buffering	No	Yes	NA
PSU Scan	Yes	Yes	Yes
PSU Announcement Group	No	No	No
PSU P25 Encryption	No	No	Yes <sup>27</sup>
PSU Status / Message	No	Status only	Status only

Table 33 Analog Channel on VRX1000 with P25 Phase II (TDMA) Trunking Mode Selected on MSU

<sup>26</sup> VRX1000 can be programmed so that MSU MIC PTT keys up either VRX1000 OR MSU side, but not both.

<sup>27</sup> P25 Encryption supported in direct mode i.e. local PSU to local PSU; no ICM support

## Analog VRS750 Compatible VRX1000 Mode

FEATURE	VRX1000 with VRS-EP Option Enabled
VRX1000 MODE	ANALOG SIMPLEX ONLY
APX MOBILE RADIO MODES	P25 trunked FDMA or TDMA P25 Conventional Conventional Analog Type II Trunked
TRANSMITTER TIME-OUT-TIMER	Yes
IN-CAR MONITOR	Yes
MSU MIC PTT	Keys up MSU only
PSU GROUP CALL	Yes
PSU EMERGENCY ALARM (PL)	Yes (Alarm only)
LEADING* AND TRAILING TONES SENT BY VRX1000 (* Trunking MSU modes only)	Yes
PSU EMERGENCY ID PASS THROUGH	Mobile ID only
VRX1000 ON/OFF CONTROL	Button on MSU Control Head or external switch (AVRA)
VRX1000 STATUS DISPLAY	MSU Control Head
NUMBER OF VRX1000 CHANNELS	1
NUMBER OF SUPPORTED MSU MODES	Maximum 2047 entries (includes zone names and actual MSU channels)
PSU STATUS/MESSAGE	No
APX MSU REMOTE MODE STEERING FROM PSU	Yes (using PL; maximum 8)
VOTING ALGORITHM	VRS750 compatible
MOBILE DETECTOR	Yes (VHF & UHF MSU only)
PORTABLE PRIORITY INTERRUPT (PPI)	Yes

Table 34 Analog VRS750 Compatible VRX1000 Mode

## Mixed VR Mode

Mixed VR mode allows Analog VR operation by switching between Digital and Analog modes as described below. The use of Mixed mode for Analog DVRS communications is not recommended since it requires special User Training to be able to handle the VR switching between analog and digital mode as described below.

Mixed VR mode should only be used when both analog and digital PSUs are required to operate on the same VR channel. Mixed VR Mode requires the MSU to be switched to a P25 Digital channel. When a VR Channel is programmed to operate in Mixed Mode, the VR can handle calls from both P25 and Analog Local PSUs while the same VR channel is selected on the MSU.

When Mixed Mode is selected, the VR can be toggled between Digital and Analog Mode as follows:

- The default VR mode is Digital i.e. the P25 modem is enabled by default.
- If a Call from a Local PSU is detected and the VR does not decode a P25 frame sync within the preprogrammed '**P25 Frame Sync Detection Timer**', the VR switches to Analog Mode and starts decoding Analog Mode signaling (such as DTMF, MDC1200). The VR repeats analog signals to the local analog PSUs and system MSUs / PSUs on the selected System channel / TG.
- After the local PSU keys off, the VR stays in the Analog Mode for the duration of the preprogrammed '**VR Ch Mixed Mode Hold Timer**'. Any outbound calls which are received by the MSU prior to the above timer's expiration will be repeated by the VR as Analog Conventional.
- Once the '**VR Ch Mixed Mode Hold Timer**' expires, the VR returns back to digital mode and any outbound calls are repeated as digital. Inbound analog calls received by the VR in Mixed Mode are repeated to the system by the MSU on the selected TG / Channel.
- If TG Proxying is enabled, digital inbound calls received by the VR are transmitted by the MSU on the TG selected on the local PSU (not on the TG selected on the MSU).

## Special Features Support

### TPS Signaling

Tactical Public Safety (TPS) Signaling support can be enabled on a VR channel, operating in conjunction with a Conventional P25, Trunking P25, or Conventional Analog mobile radio channel. This capability enables specially programmed local PSUs to transmit TPS Leading and / or Trailing IDs. TPS Emergency can also be received and processed by the VR when on the corresponding TPS Enabled Analog channel.

Notes:

1. Conventional portable transmission – ID of conventional portable displays on other conventional portables and also displays on MSU (APX mobile connected to VRX1000), conventional portable ID's do not display on System portables
2. System portable transmission – ID of System portable shows up on conventional portables, MSU and other System portables
3. The MSU does not pass conventional portable ID's to system portables

## Data Sheets

Futurecom website → Products → DVR-LX → Supporting Documents → DVR-LX Datasheet

Futurecom website → Products → VRX1000 → Supporting Documents → Product Datasheet – VRX1000

## Contact Information

### **Technical Support**

905-532-1158  
support@futurecom.com

### **Orders**

Please contact Motorola / Drop Ship

### **Return Authorizations**

1-800-701-9180

### **Head Office and Manufacturing**

3277 Langstaff Rd  
Concord, Ontario L4K 5P8  
Canada  
905-660-5548

[www.futurecom.com](http://www.futurecom.com)



## Glossary

Keyword	Description
<b>ACK</b>	Acknowledgement of communications.
<b>AVRA</b>	Automated VR Activation. Programmable feature which permits automated activation of the VR by either using a VIP input on the MSU CH / DEK or a pin on the VR Auxiliary cable. Requires external logic / switch not supplied with the VR hardware.
<b>Authentication</b>	To prevent unauthorized access for Conventional <b>DVRS Enabled</b> PSU, Authentication key can be loaded on the authentication capable <b>DVRS Enabled</b> PSU.
<b>Band Lock</b>	When enabled, causes the MSU to block usage of the same frequency band as the VR while the VR is active. Enabled by default when no in-band filter is present.
<b>BL</b>	Busy Lockout – dynamic voting phase (follows the static Primary / Secondary phase) of the VR simulcast prevention algorithm.
<b>Channel</b>	A group of characteristics, such as transmit / receive frequency pairs, radio parameters, encryption encoding etc.
<b>Coded Squelch</b>	Tone Private-Line (PL) or Digital Private-Line (DPL). Used on conventional channels for signal validation.
<b>Conventional</b>	Refers to radio-to-radio communications, sometimes through a base station repeater or vehicular repeater.
<b>Dispatcher</b>	An individual who has radio system management duties.
<b>DPL Coded Squelch</b>	A continuous sub-audible data signal transmitted with the carrier. See Coded Squelch.
<b>VR</b>	Futurecom Vehicular Repeater.
<b>VR Mode</b>	Determines the communication exchange capabilities between System Users and Local Portable Users; Can be set to OFF, LOCAL or SYSTEM.
<b>DVRS</b>	Vehicular Repeater interfaced to a Remote Mount APX Mobile radio with or without Control Head.
<b>'DVRS Enabled' PSU</b>	P25 XTS1500, XTS2500, XTS5000, APX4000, APX6000 or APX7000 Portable Radio with enabled DVRS operation.
<b>FCC</b>	Federal Communications Commission.
<b>FNE</b>	Fixed Network Equipment – Trunking or Conventional System Infrastructure

Keyword	Description
<b>Forced Analog Mode</b>	Hybrid VR Mode of operation where communications between the VR and the P25 ' <b>DVRS Enabled</b> ' PSUs are digital while the voice communications are forced to be analog whenever a non-P25 channel / TG is selected on the MSU.
<b>FRC</b>	Futurecom Repeater Configurator
<b>Heart Beat</b>	P25 Message periodically sent by a Primary VR to other VRs during Primary / Secondary processing.
<b>HUB</b>	Hang Up Box – refers to the MSU Microphone being on hook or off hook.
<b>ICM</b>	In Car Monitor – when enabled in the MSU, allows the MSU user to monitor voice traffic to and from the local PSU
<b>Inbound Call</b>	A Call transmitted by Local PSU and received by the VR.
<b>Local Mode</b>	VR Mode which provides extended portable-to-portable voice and data range by repeating Local PSU (optionally MSU) communications without keying up the mobile radio interfaced to the VR.
<b>Local PSU</b>	PSU switched to the VR channel and used for communication with the VR
<b>Local Tx Fallback</b>	When enabled, the MSU reverts to local call if the MSU fails to access the system.
<b>Mode</b>	<b>MSU / PSU</b> - A programmed combination of operating parameters. <b>VR</b> – OFF, SYSTEM or LOCAL (see <b>VR Mode</b> )
<b>MSU</b>	Mobile Subscriber Unit
<b>NAC</b>	Network Access Code – used in P25 mode for validation of P25 radio communications, similar to the use of PL/DPL in analog mode. Also used for VR Steering.
<b>NID</b>	Network ID - see Network Access Code (NAC)
<b>Outbound Call</b>	System Call received by the MSU
<b>PSU</b>	Portable Subscriber Unit
<b>PSU Scan</b>	This feature allows a scan list to be attached to PSU that is configured with DVRS as its system type. This enables an Enhanced PSU to support conventional scan feature.
<b>PTT</b>	Push to talk. The PTT engages the transmitter (of the Portable or Mobile radio and / or VR) when pressed.

Keyword	Description
<b>RF</b>	Radio Frequency. Part of the general frequency spectrum 10kHz - 10,000,000 MHz
<b>RSSI</b>	Received Signal Strength Indicator
<b>System Mode</b>	VR mode which provides extended voice and signaling communications between System Users and Local Portable users over the selected VR channel / Mobile Radio Mode.
<b>Talk Group</b>	A group of radio users who communicate with each other by using the same communication path.
<b>Talk Group Translation</b>	Feature where the PSU talkgroup is translated by the VR to match the currently selected MSU talkgroup.
<b>Trunking</b>	The automatic sharing of radio frequencies by large number of users based on communication path sharing for the length of a conversation.

## References

### Compatibility Chart

**DVRS: VR Compatible APX Mobile Radios and**

**DVRS: VR Compatible XTS/APX Portable Radios list**

[Futurecom Website](#) → [Support](#) → [Documentation and Software](#) → [DVR-LX/DVR/VRX1000](#) → [Compatibility Charts](#)

### Vehicular Repeater (VR) User's Guide Template

[Futurecom Website](#) → [Support](#) → [Documentation and Software](#) → [DVR-LX/DVR/VRX1000](#) → [Vehicular Repeater \(VR\) User's Guide Template](#)

### Over the Air Programming Via Radio Manager User Guide

[Futurecom Website](#) → [Support](#) → [Documentation and Software](#) → [DVR-LX/DVR/VRX1000](#) → [Over the Air Programming Via Radio Manager User Guide](#)

### VR Ordering Guides

[Futurecom Website](#) → [Products](#) → [DVR LX - Digital Vehicular Repeater](#) → [DVR-LX Ordering Guide](#)

[Futurecom Website](#) → [Products](#) → [DVR - Digital Vehicular Repeater](#) → [DVR Ordering Guide](#)

[Futurecom Website](#) → [Products](#) → [VRX1000 - Digital Vehicular Repeater](#) → [VRX1000 Ordering Guide](#)

### Data Sheets

#### DVR-LX®

[Futurecom Website](#) → [Products](#) → [DVR-LX](#) → [Supporting Documents](#) → [DVR-LX Data Sheet](#)

#### VRX

[Futurecom Website](#) → [Products](#) → [VRX1000](#) → [Supporting Documents](#) → [Product Datasheet VRX1000](#)